

FIGURE 1

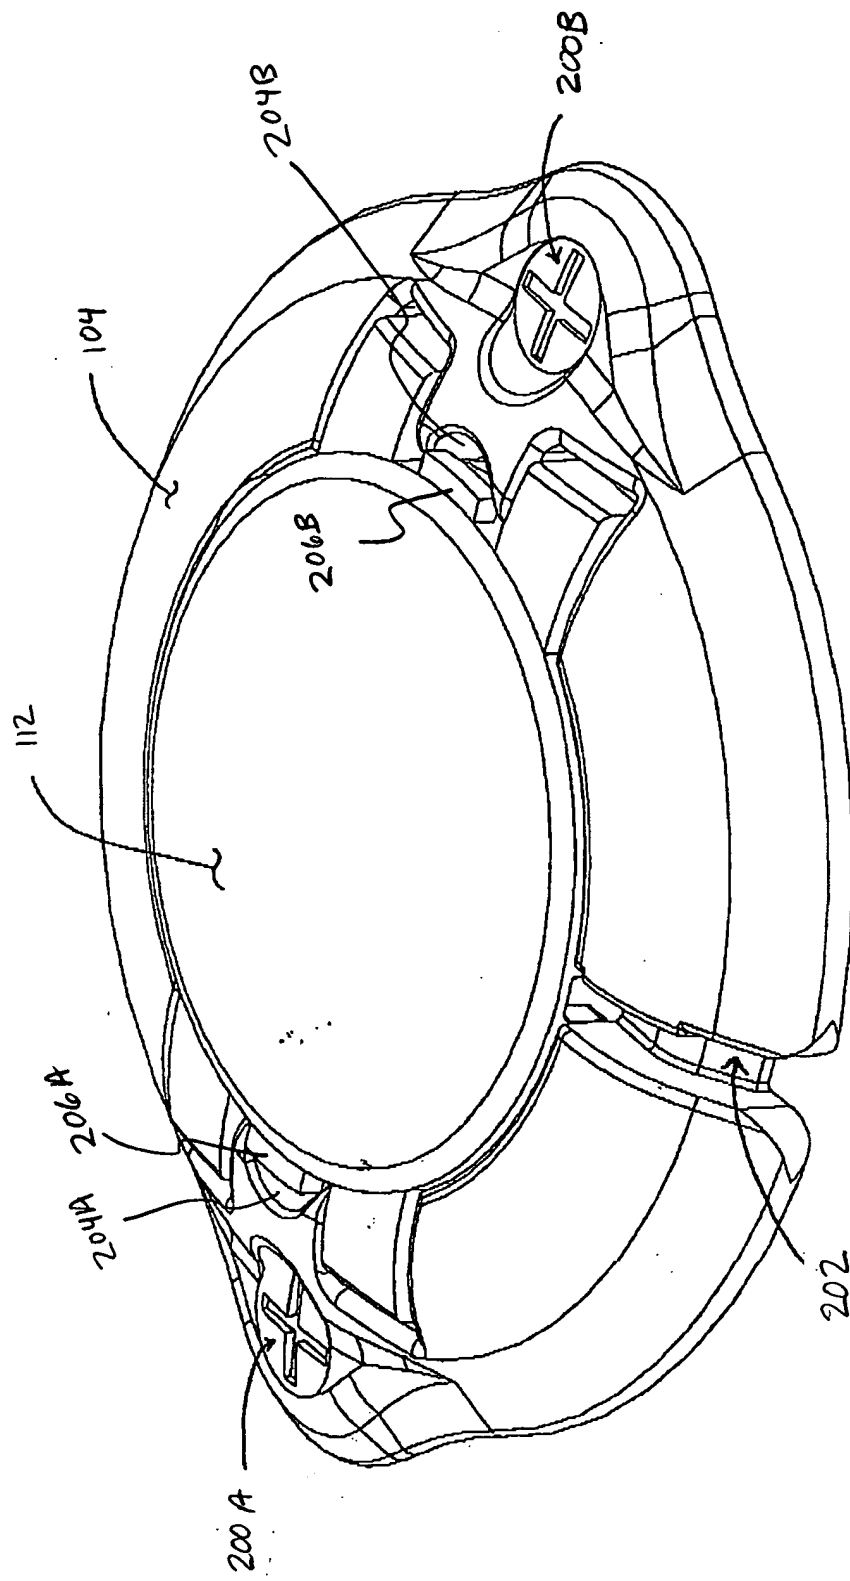


FIGURE 2

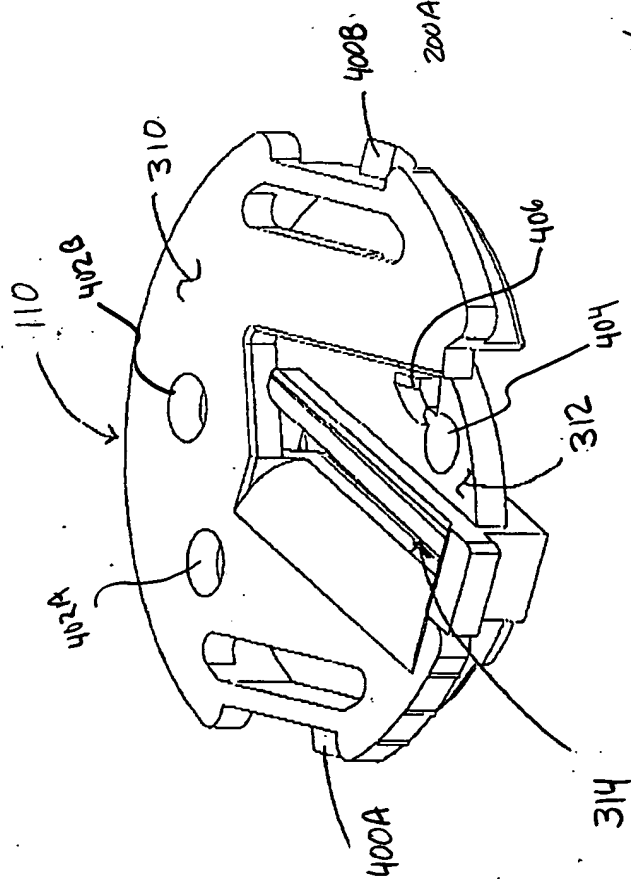
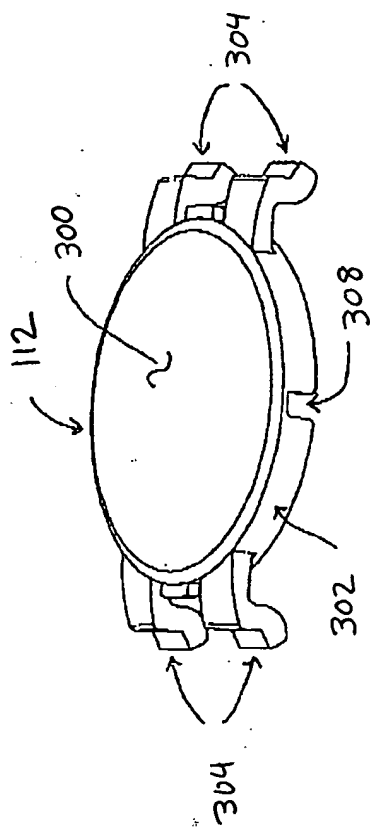


FIGURE 4

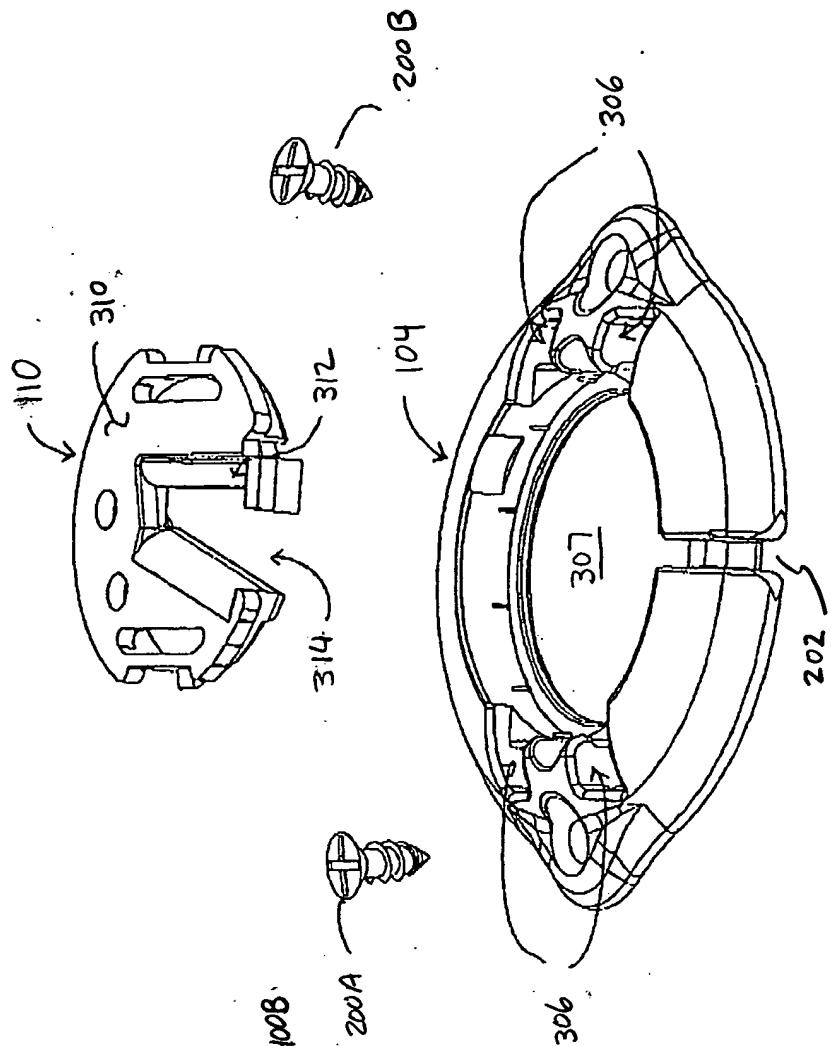


FIGURE 3

FIG. 5 is a perspective view of the device 100 in a closed position.

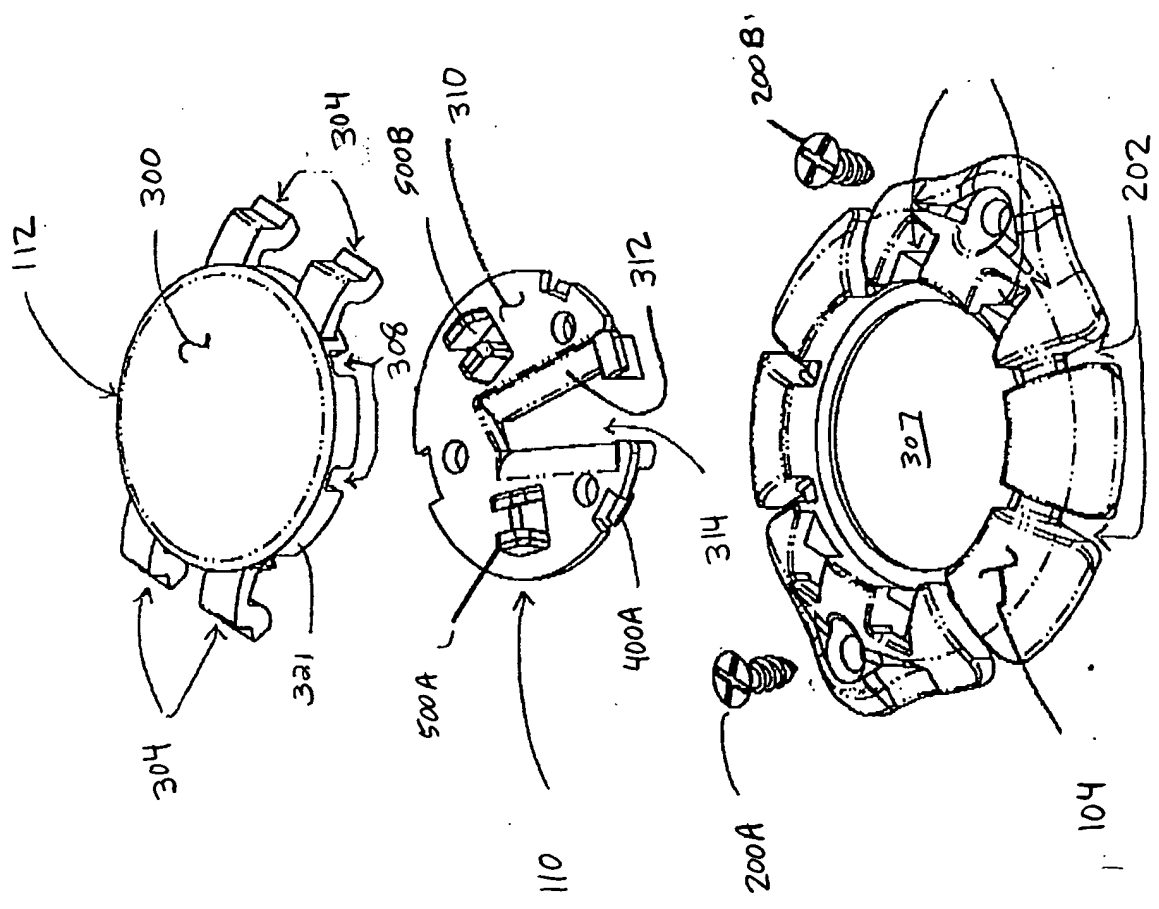


FIGURE 5

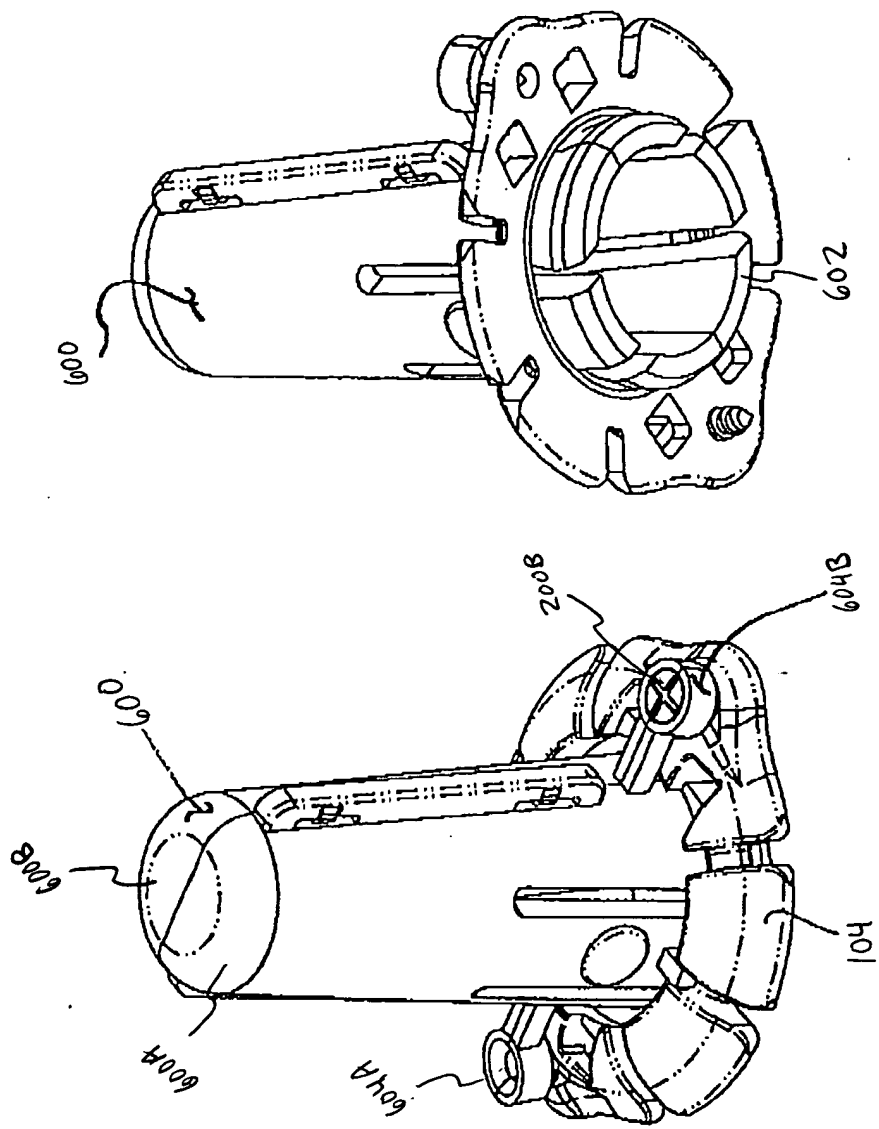


FIGURE 6

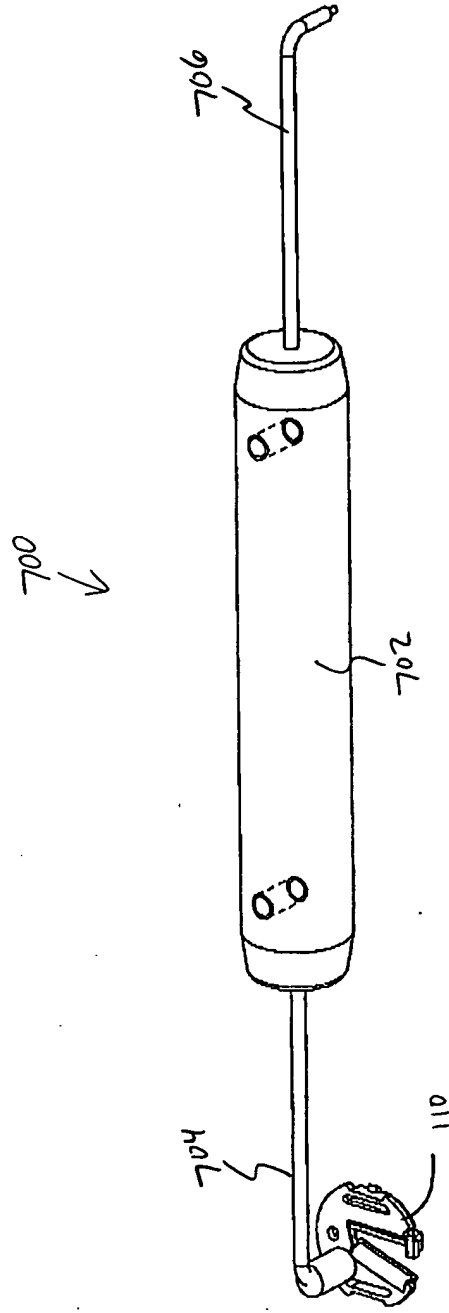
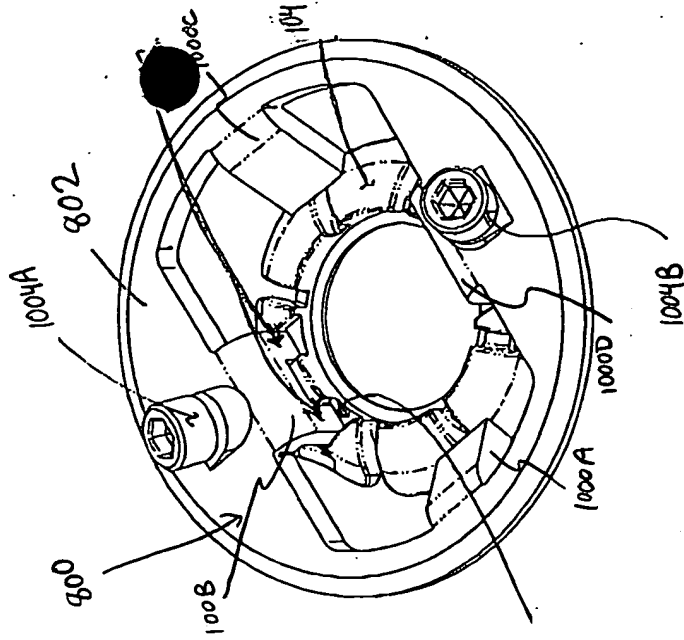
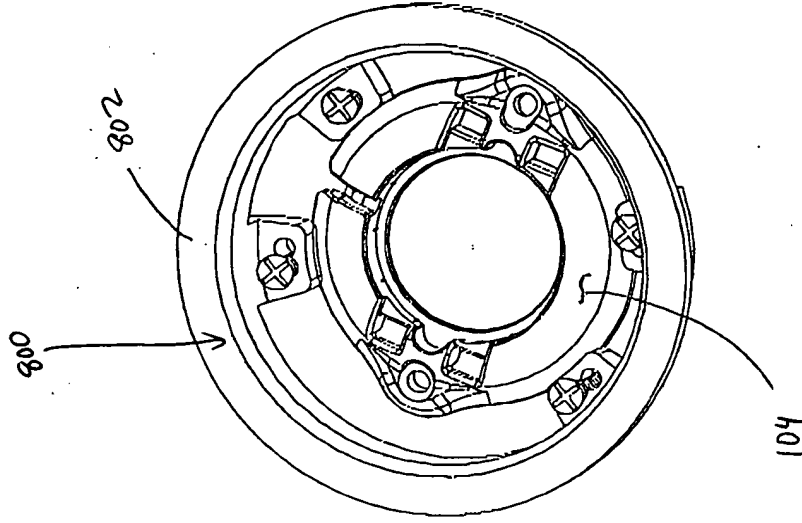
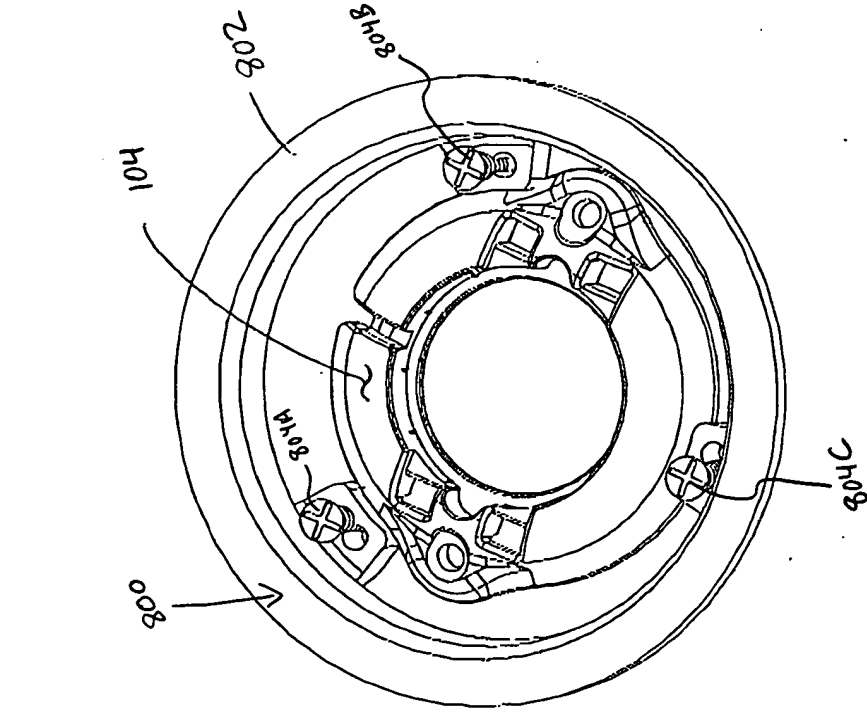
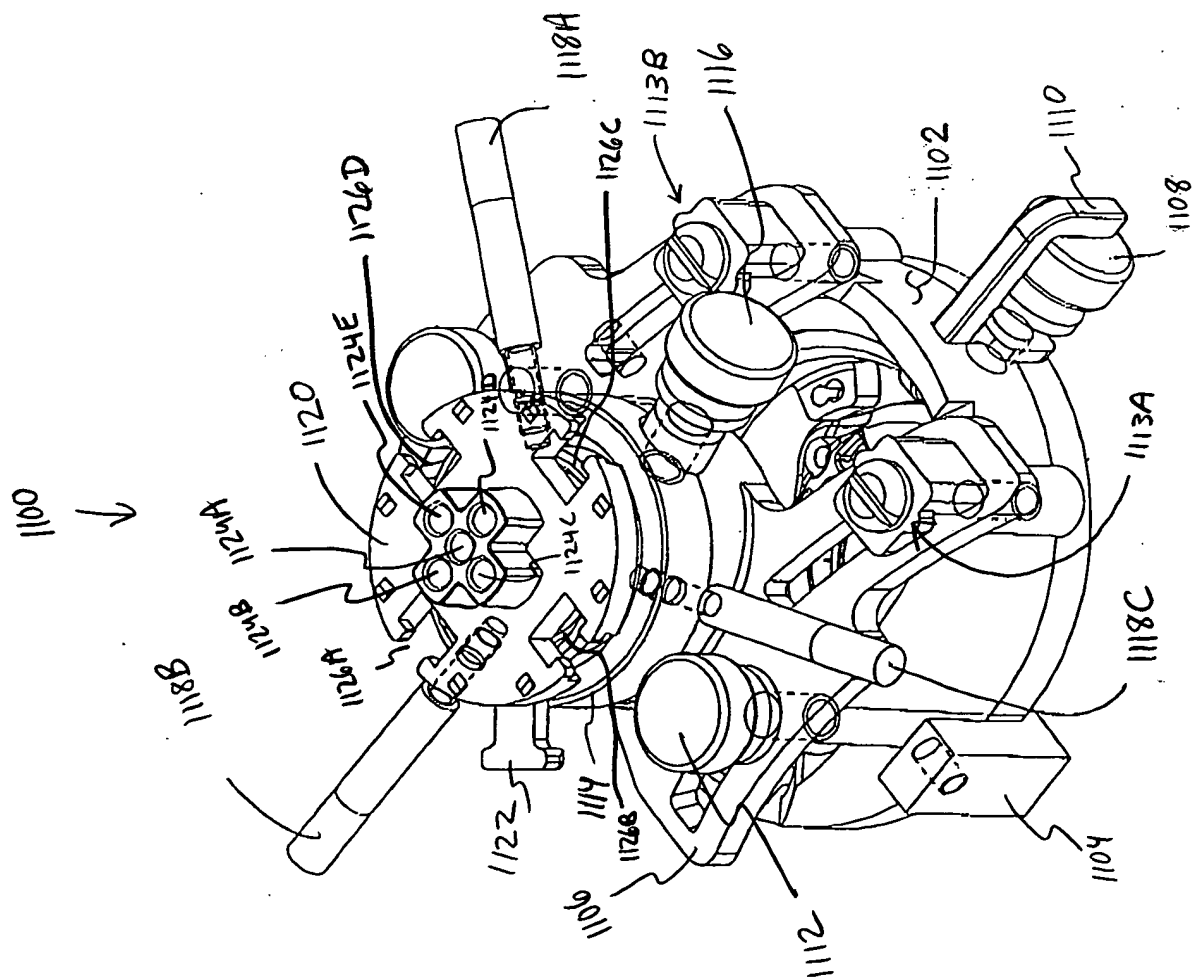
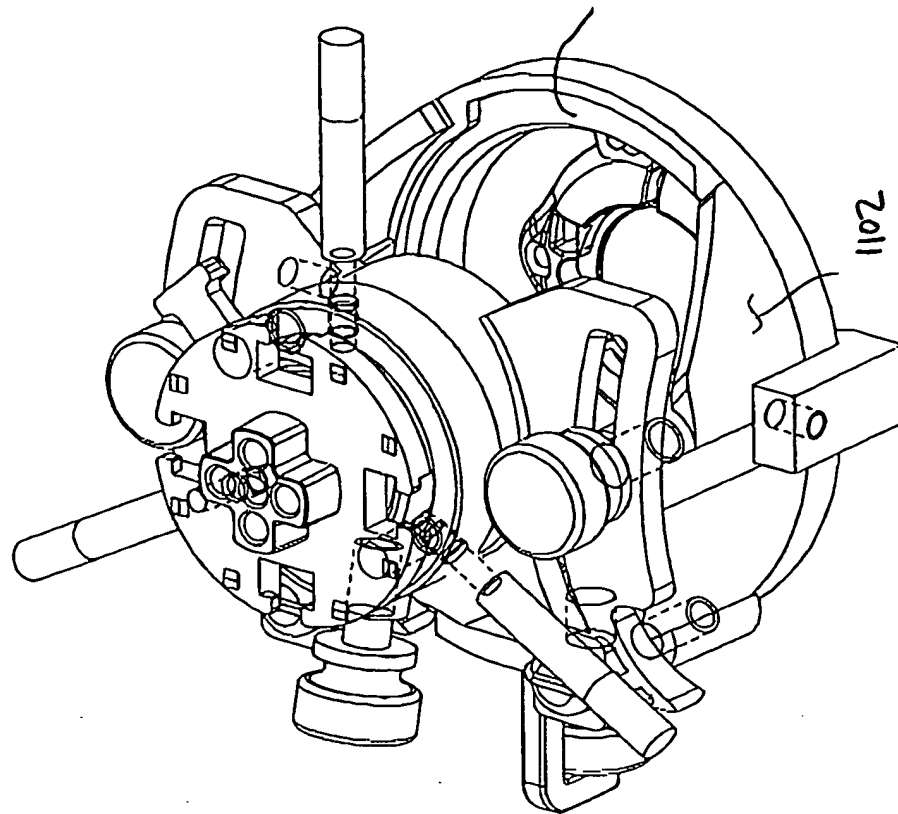


FIGURE 7







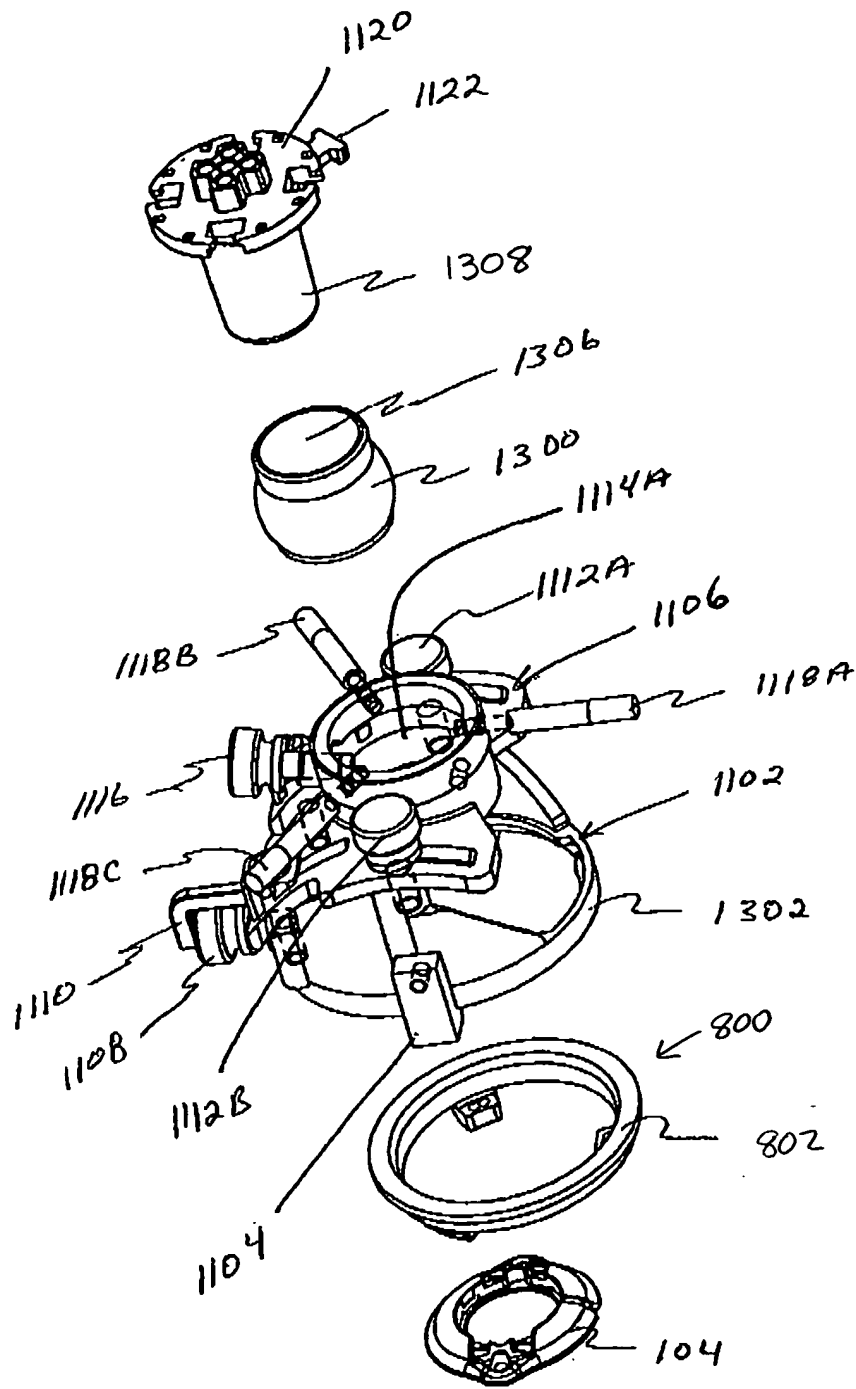


Figure 13

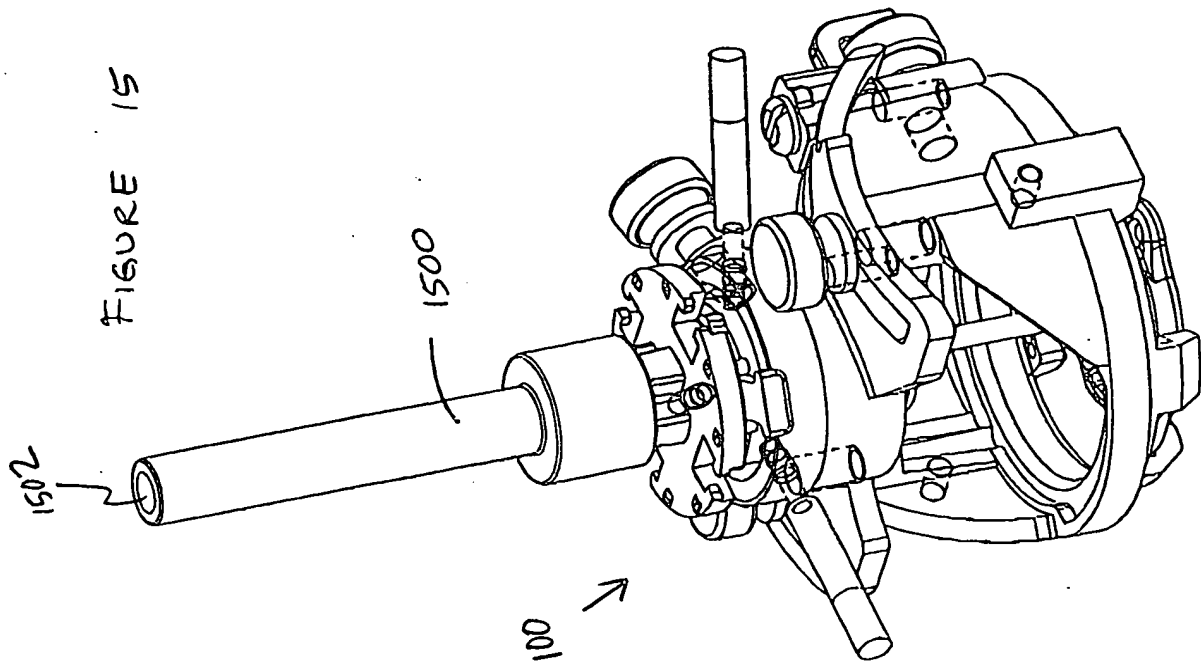
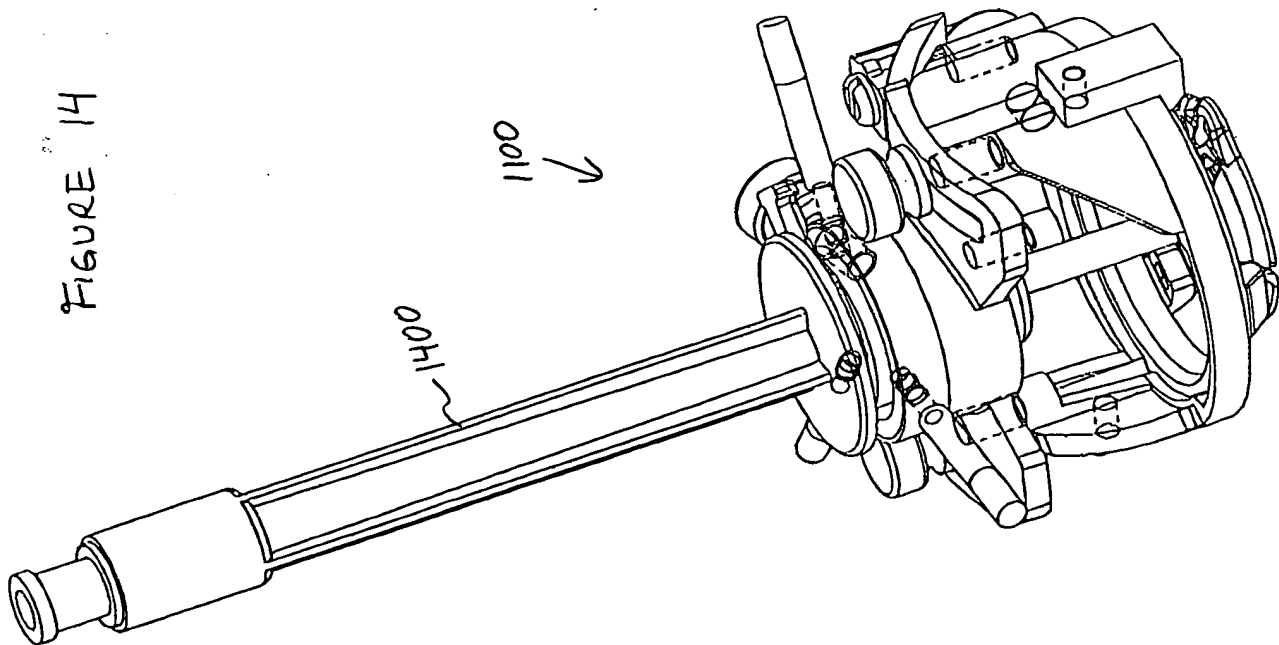


FIGURE 16

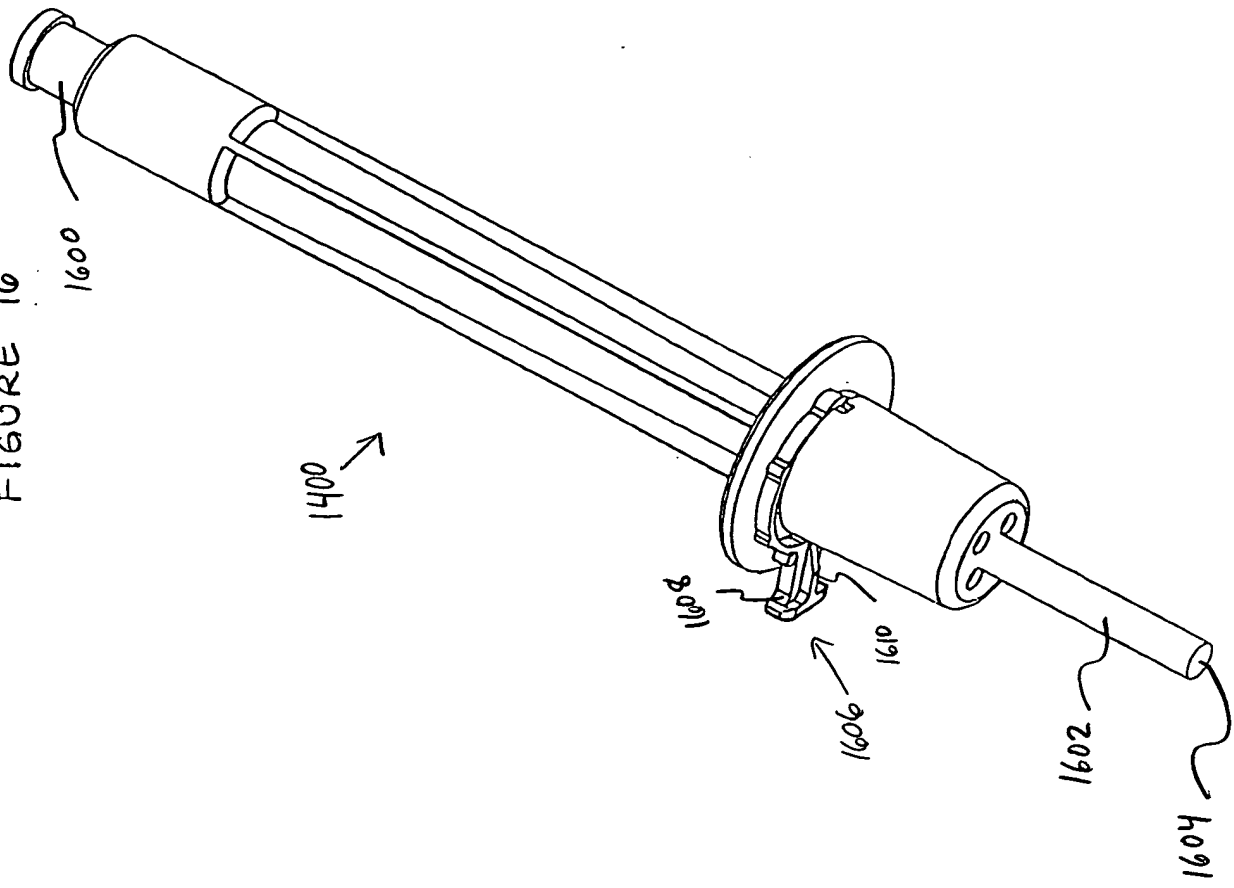
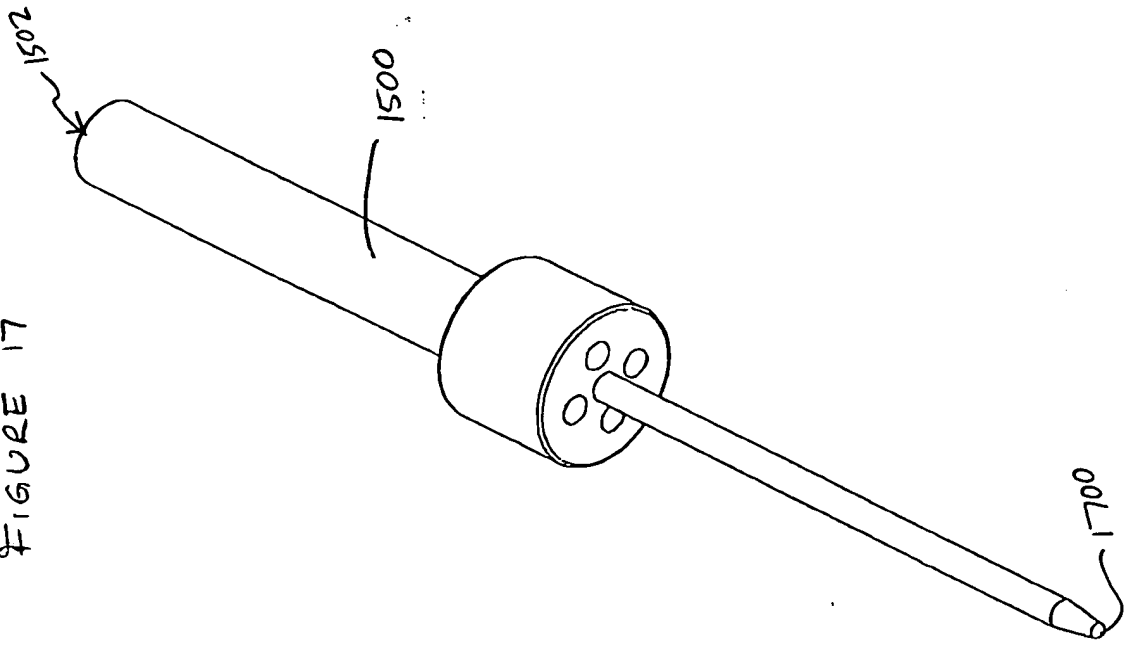


FIGURE 17



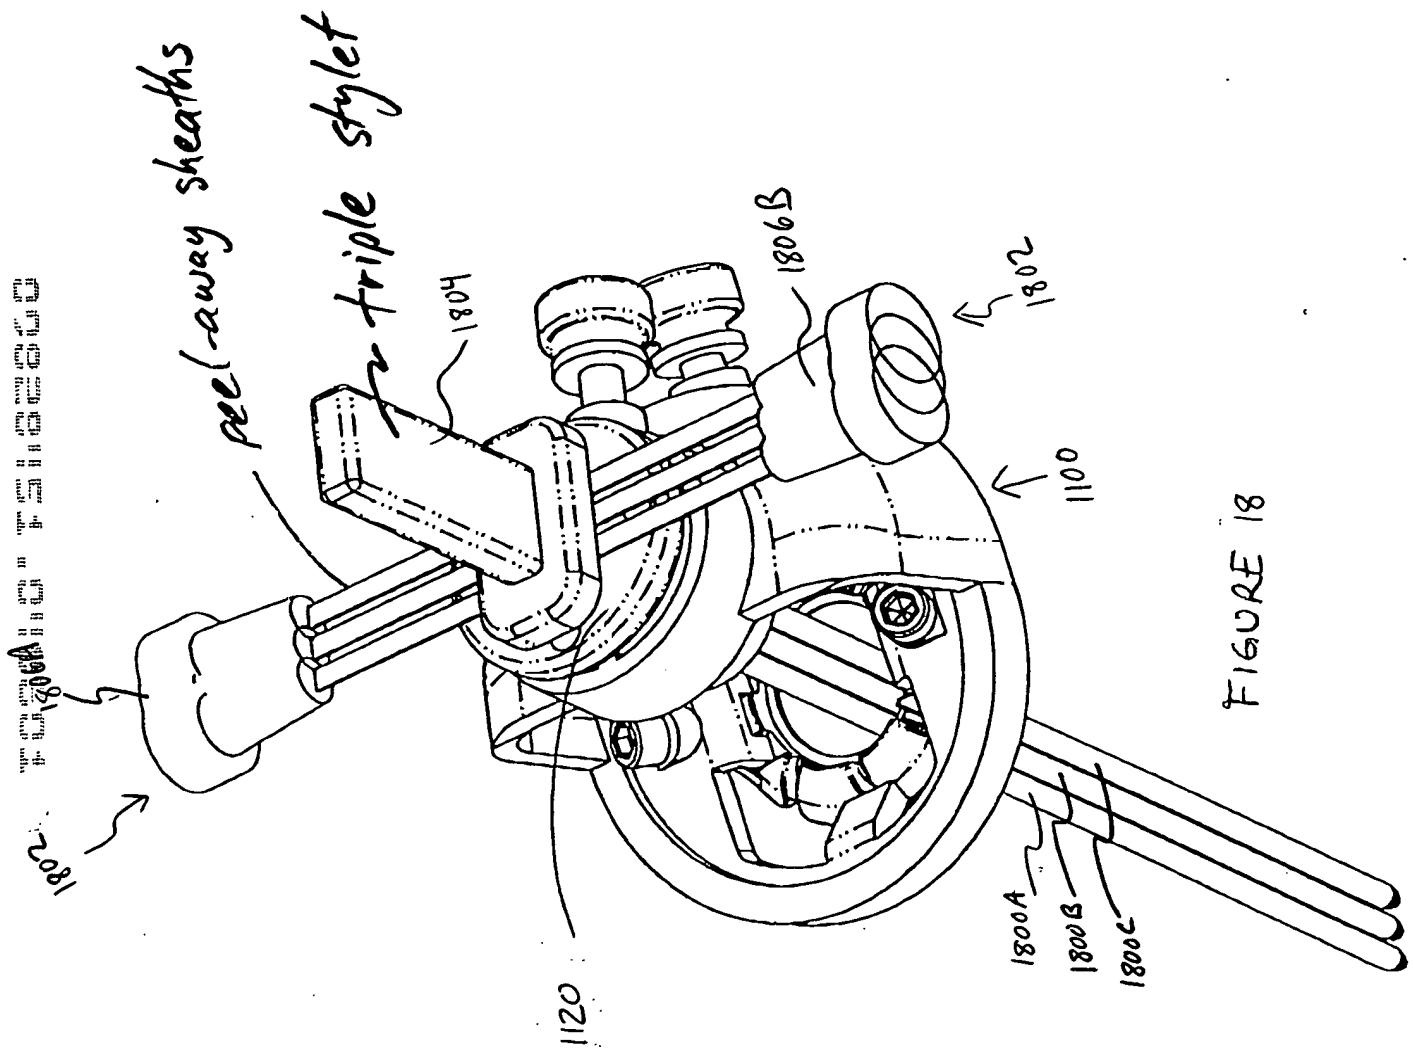
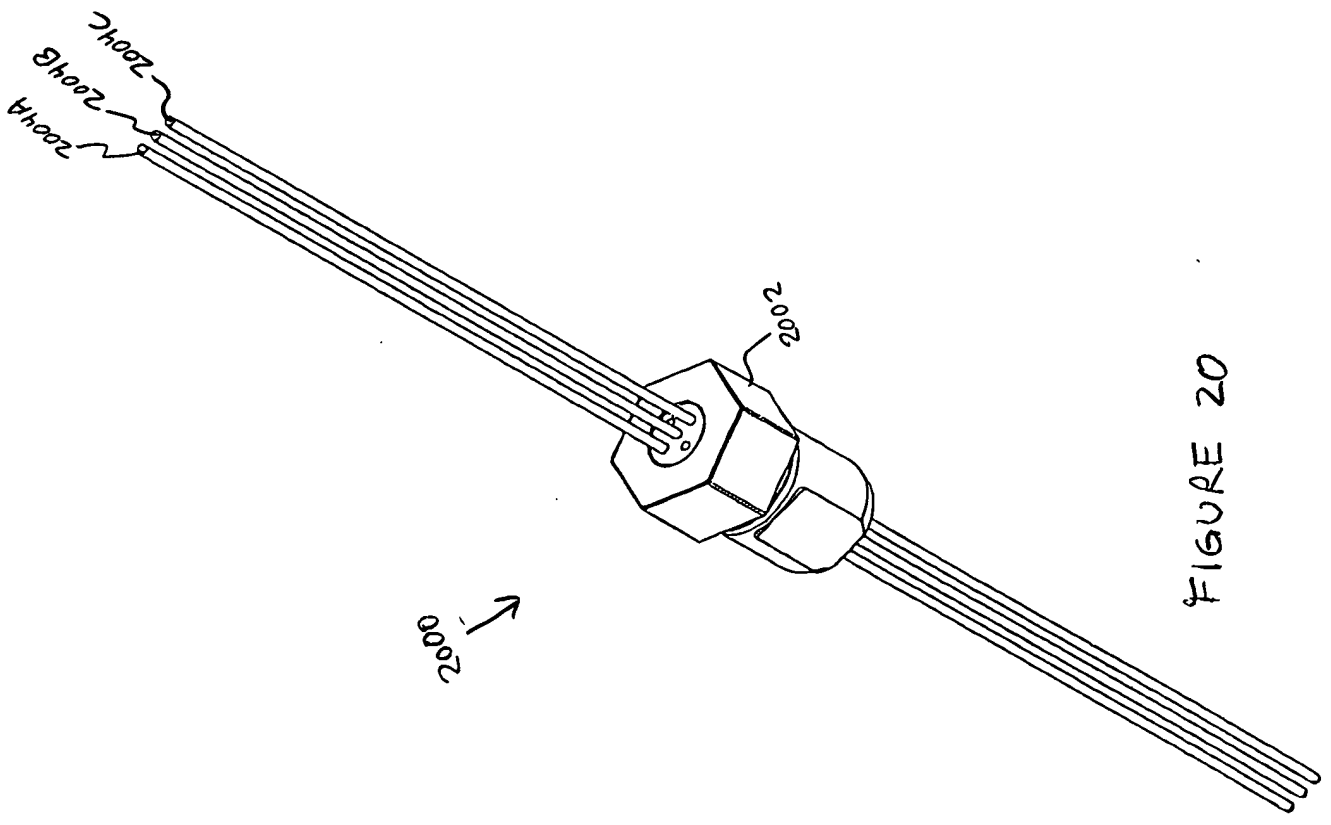
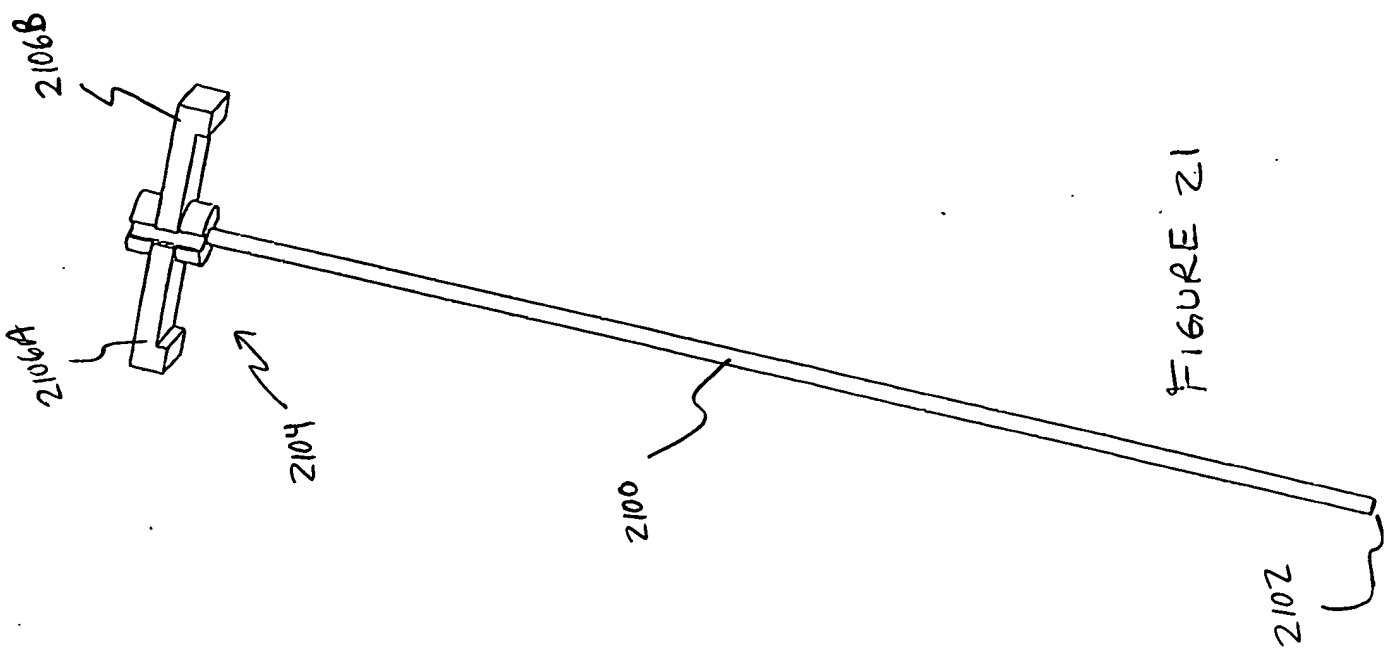


FIGURE 18





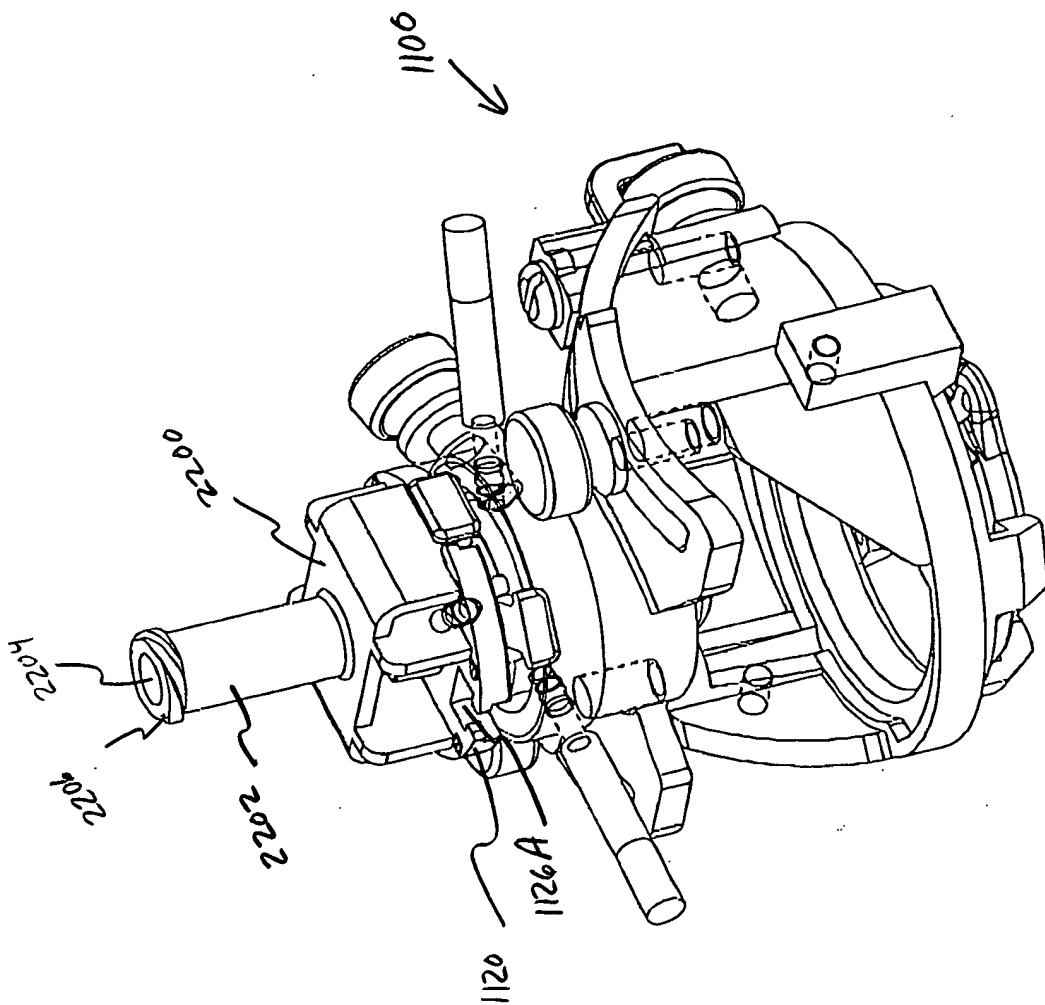


FIGURE 22

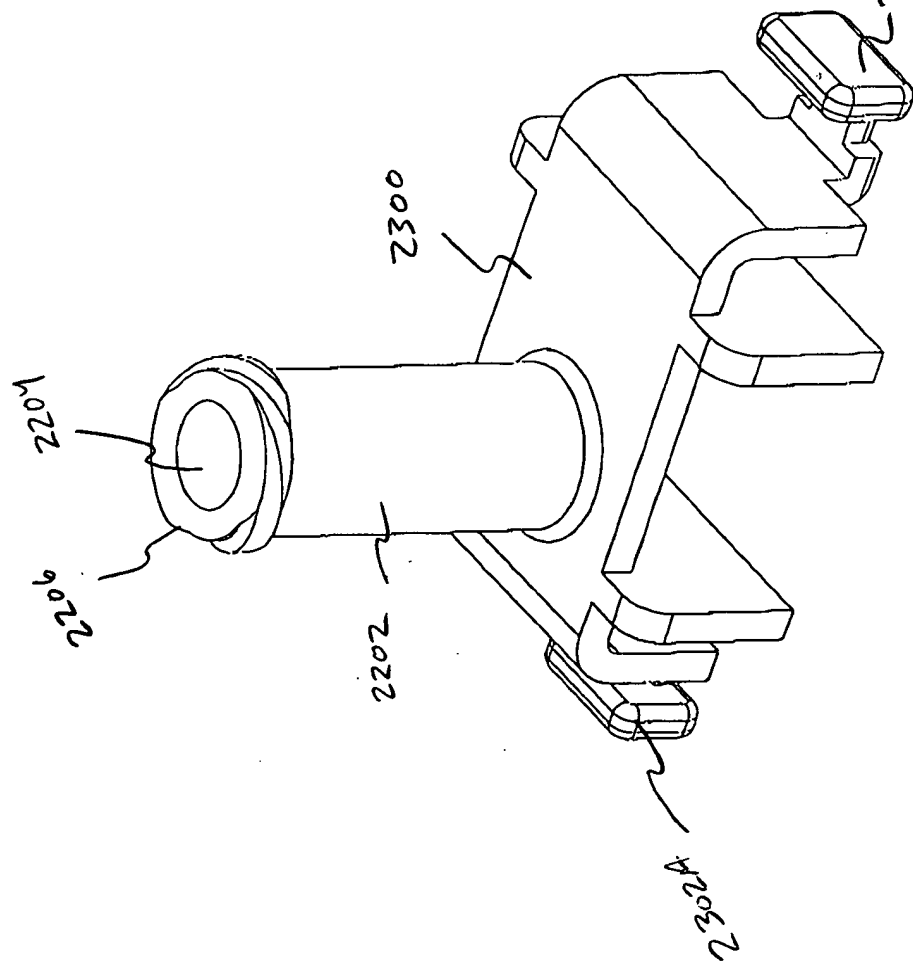


FIGURE 23

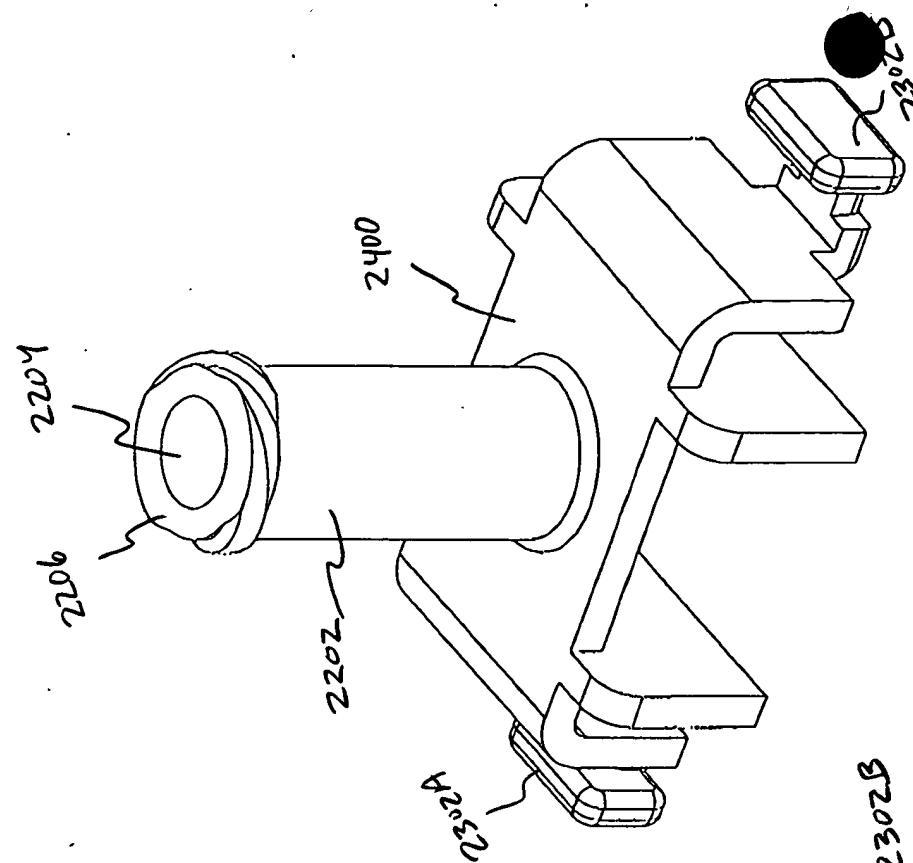
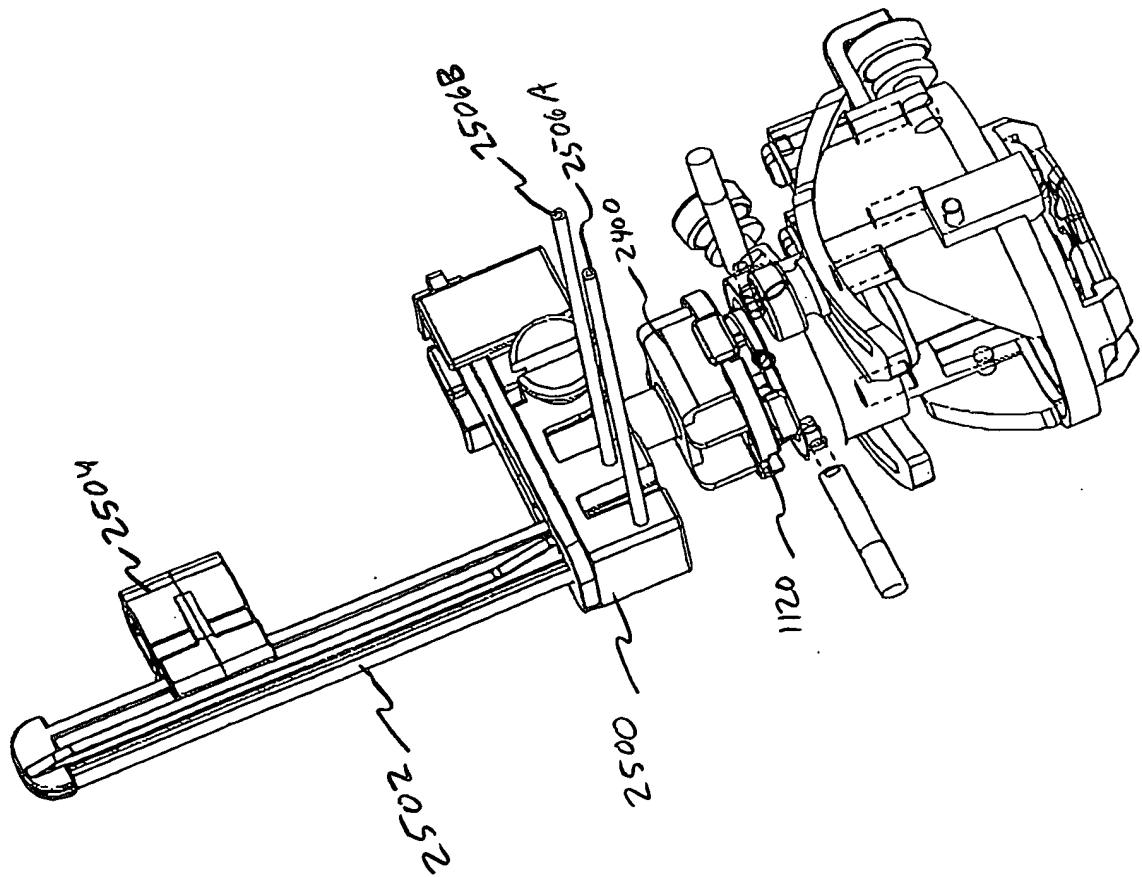
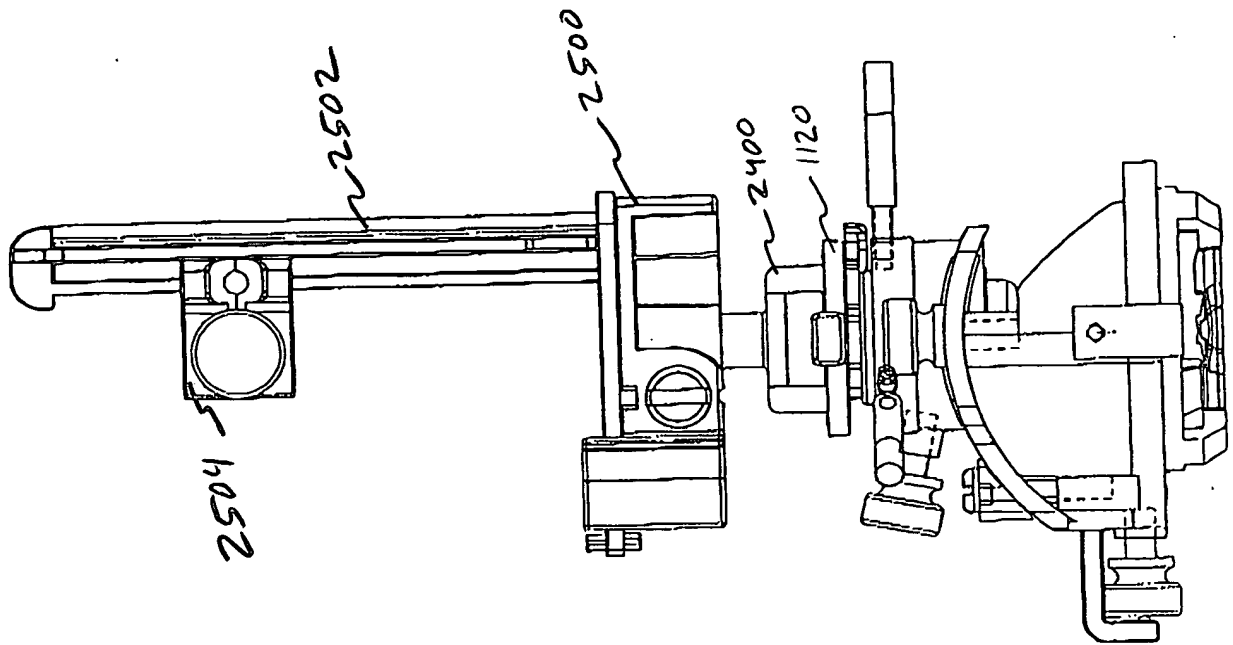


FIGURE 24





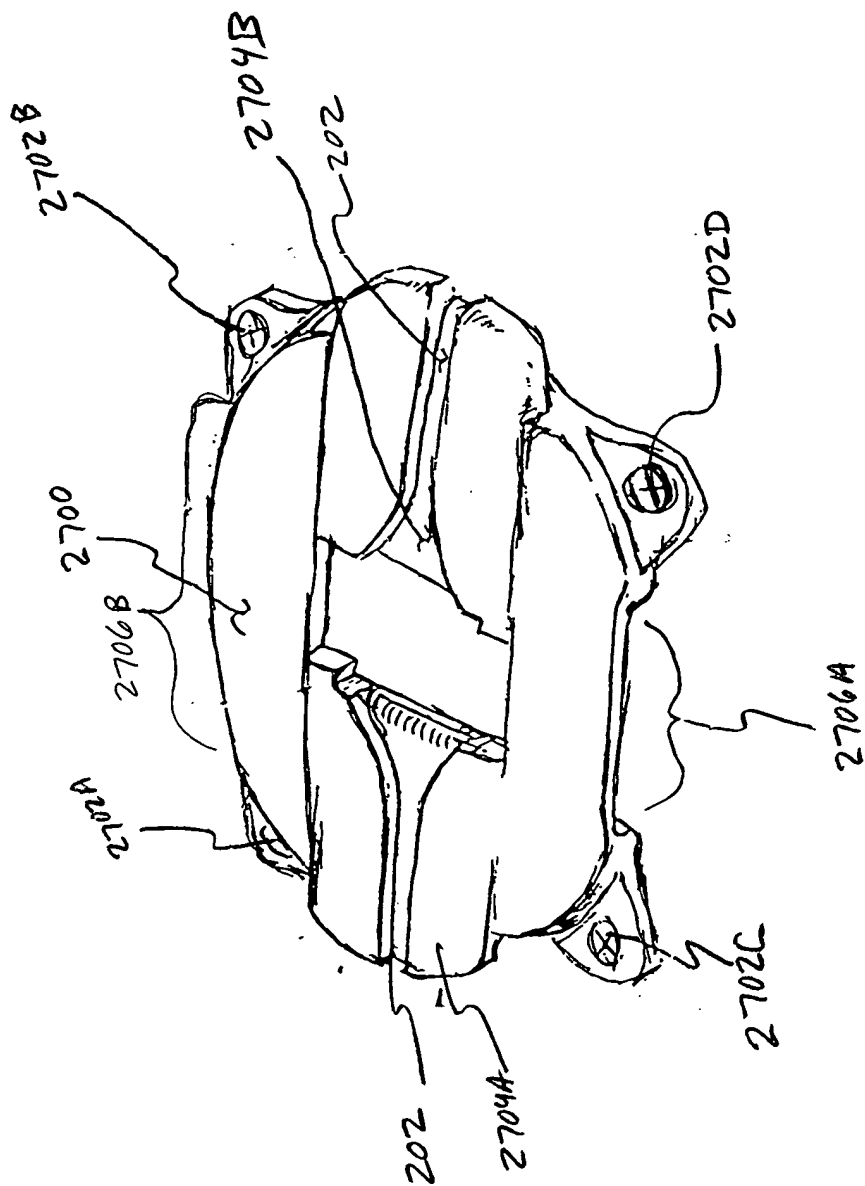


FIG. 27

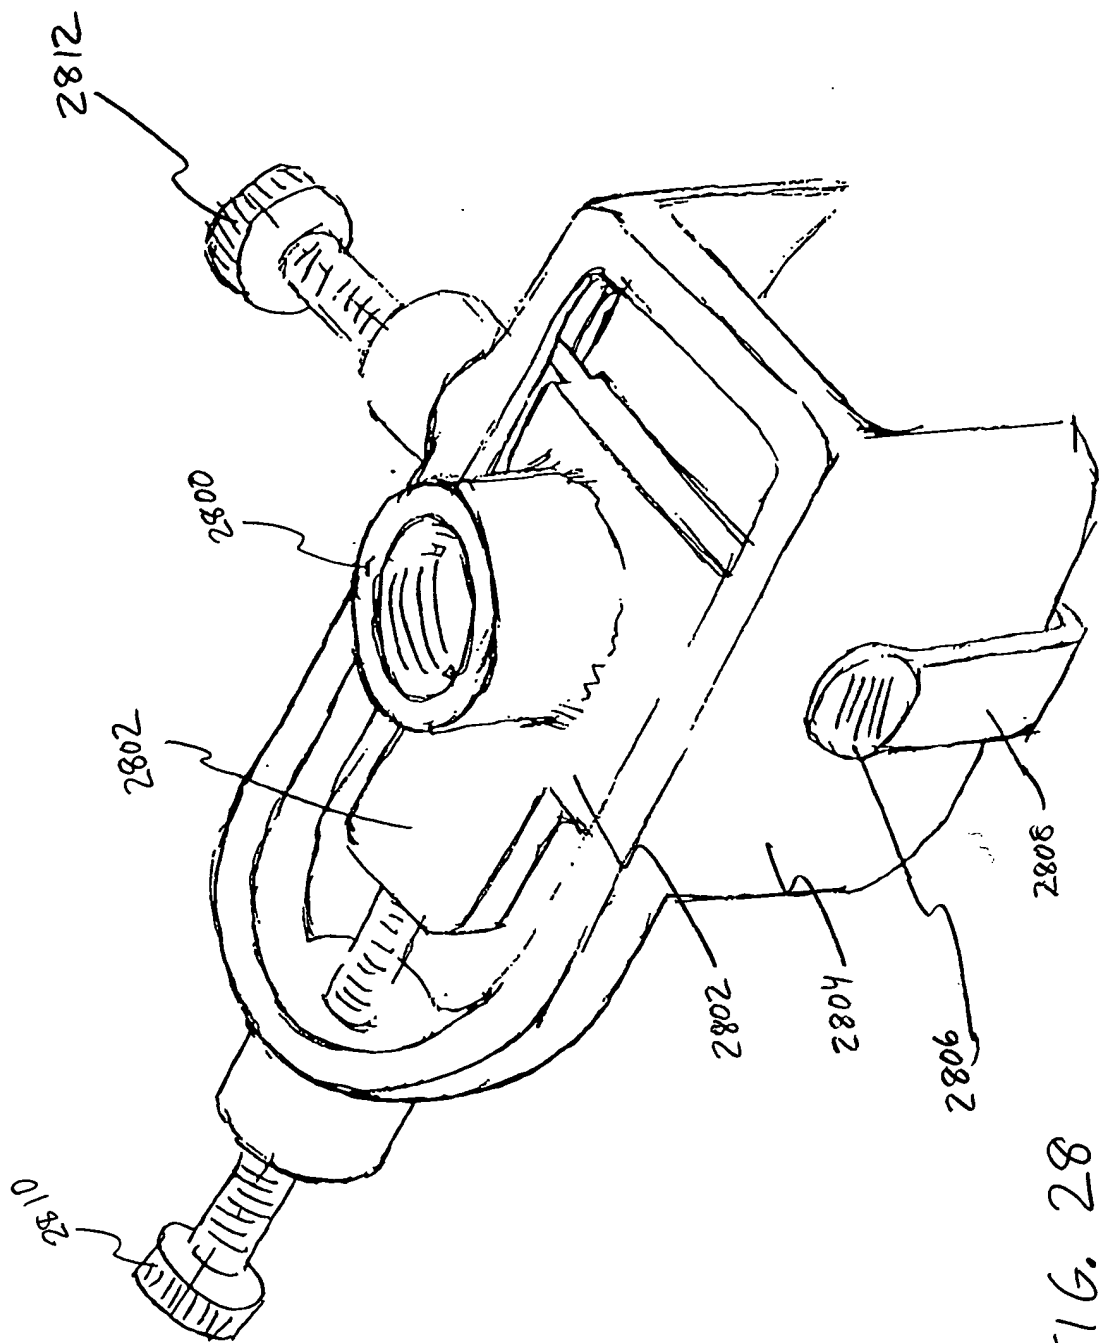


FIG. 28

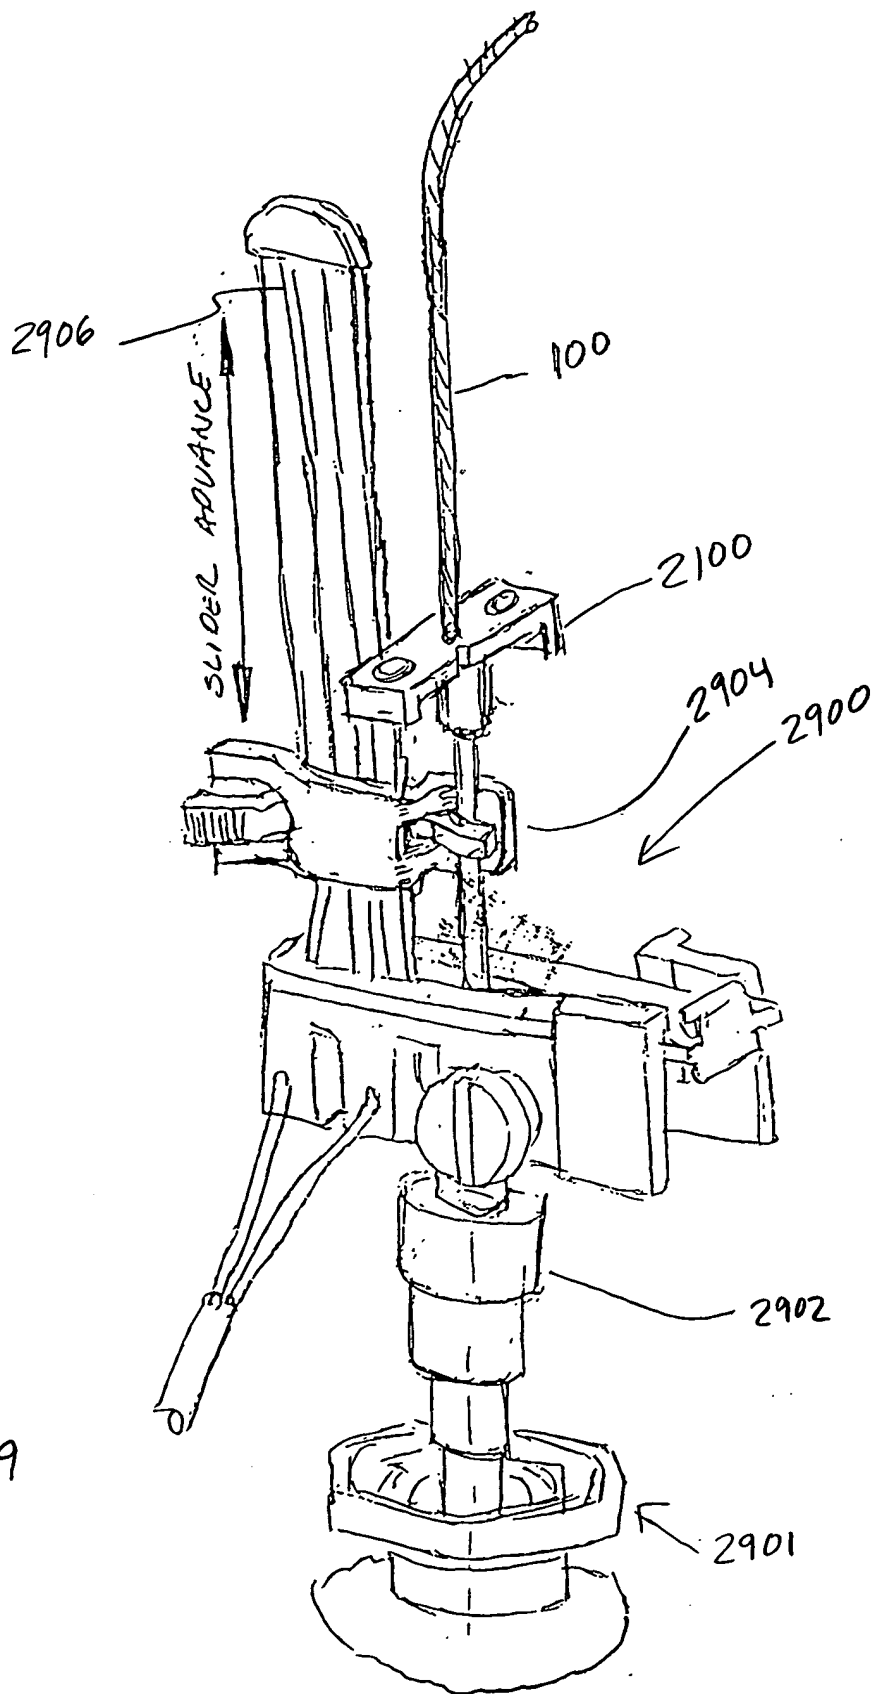


FIG. 29

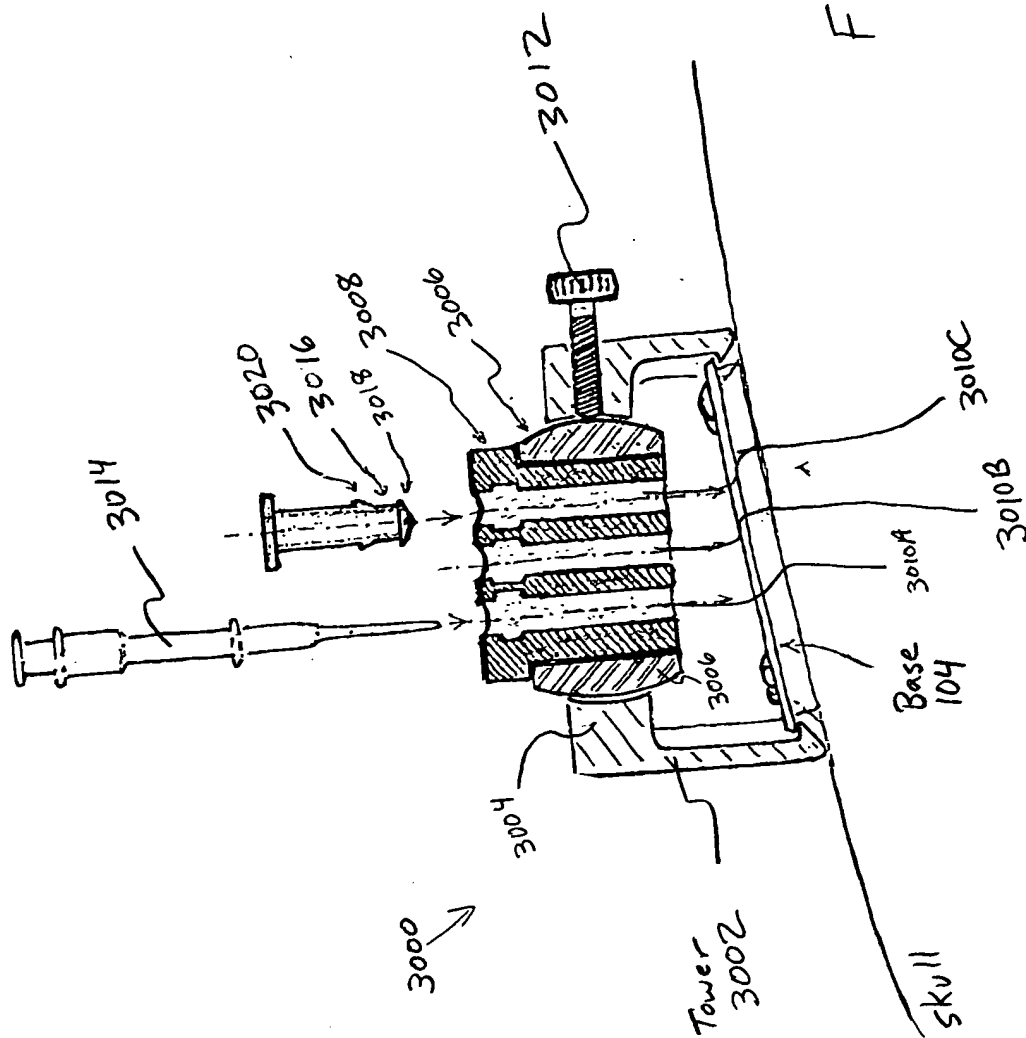


FIG. 30

FIG. 31

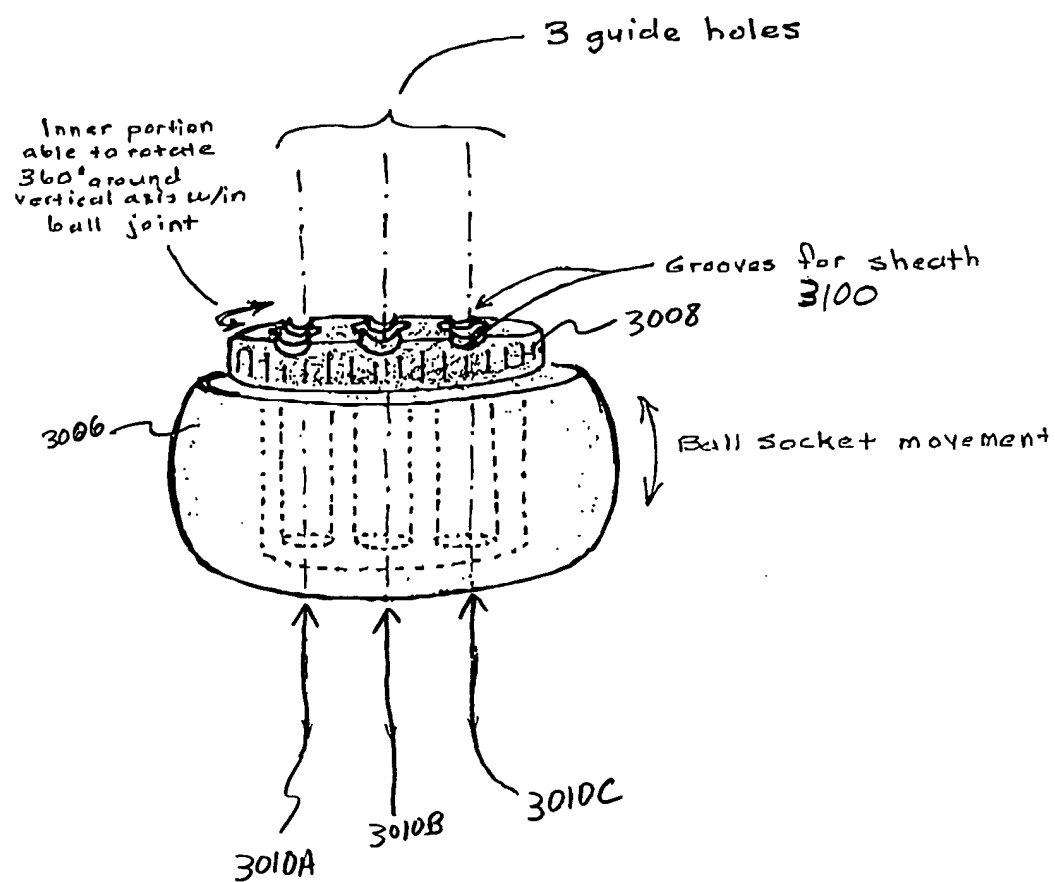
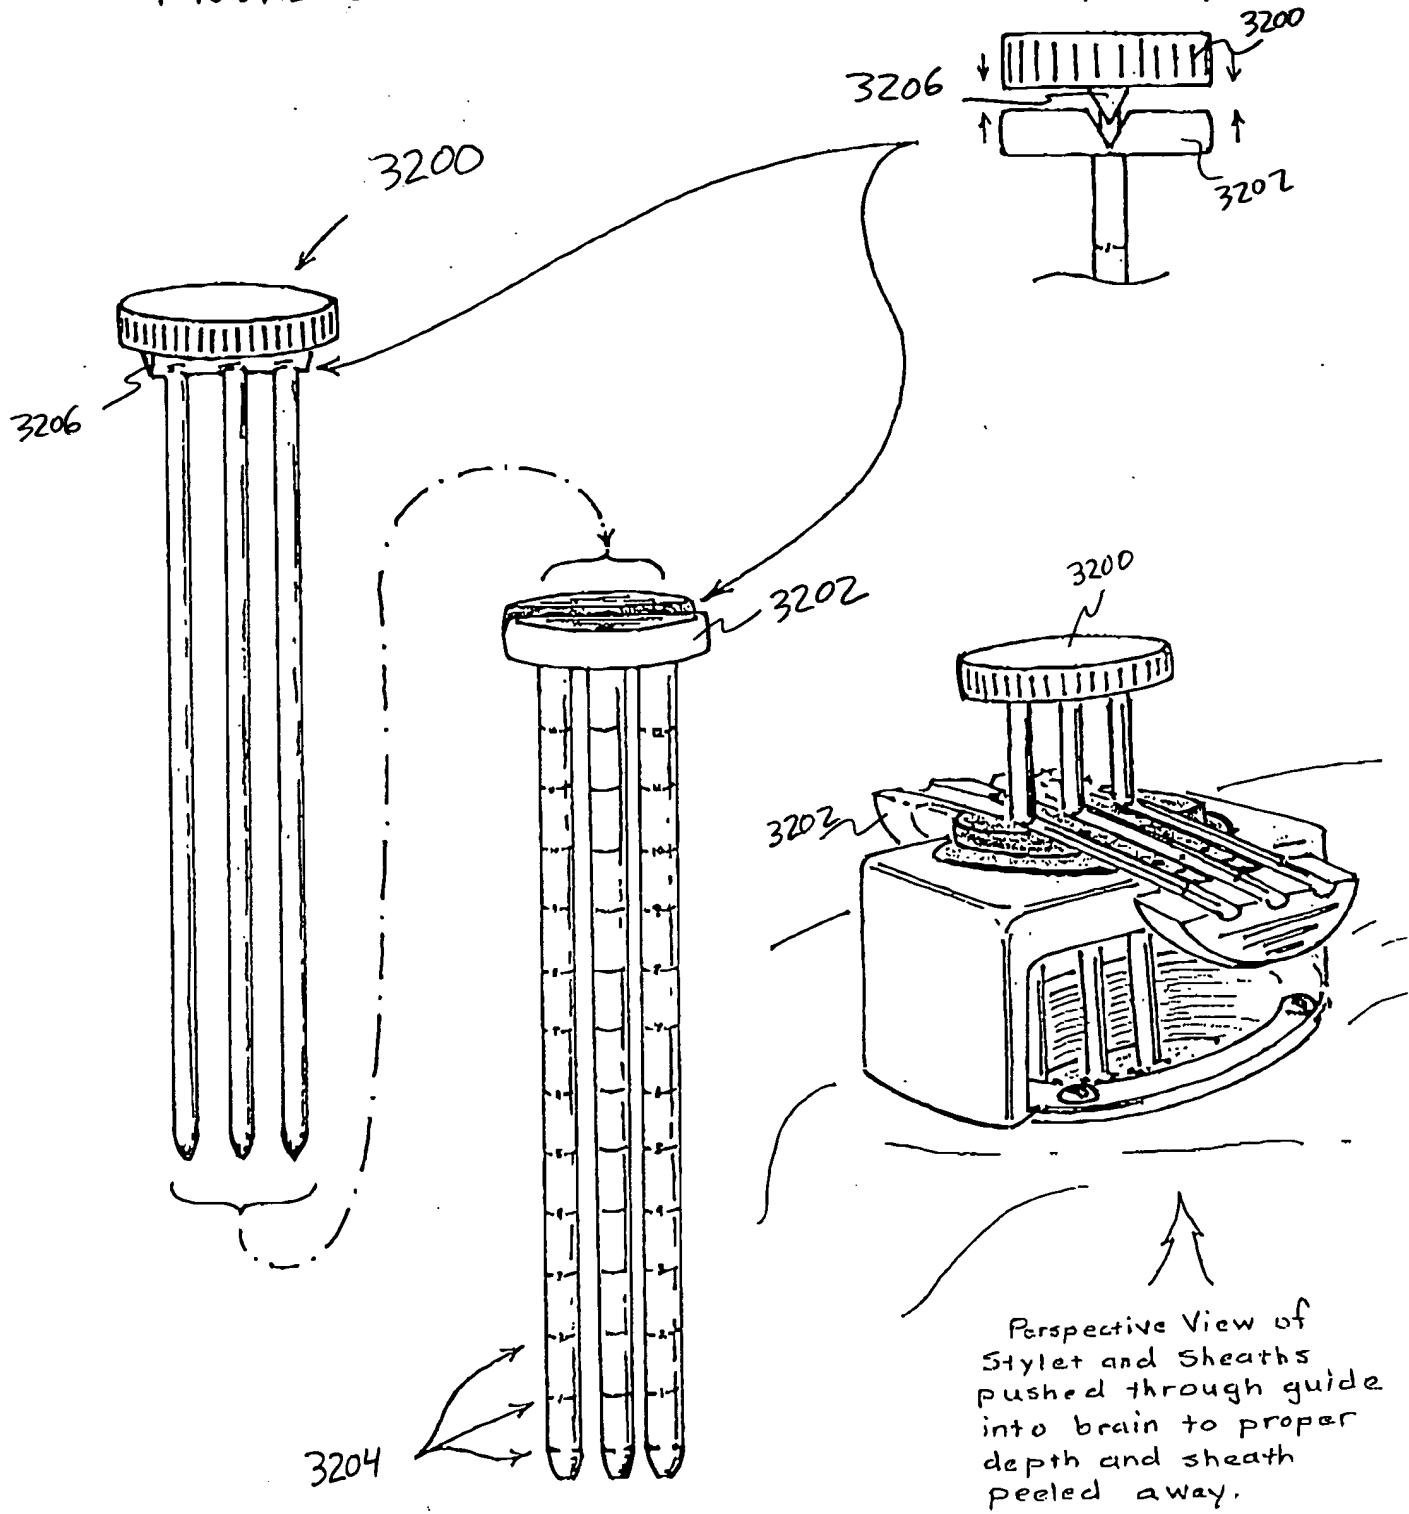


FIGURE 32

Side view of interface  
between stylet and sheath unit.  
Push together to initiate  
split or peel-away sheath.



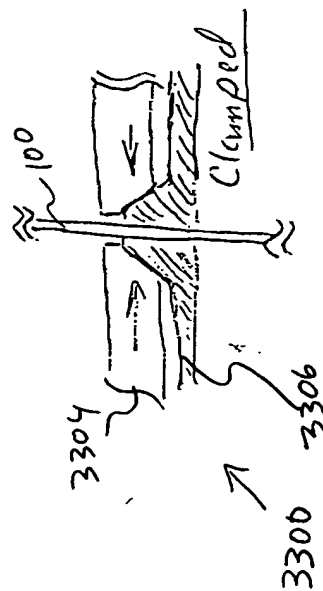
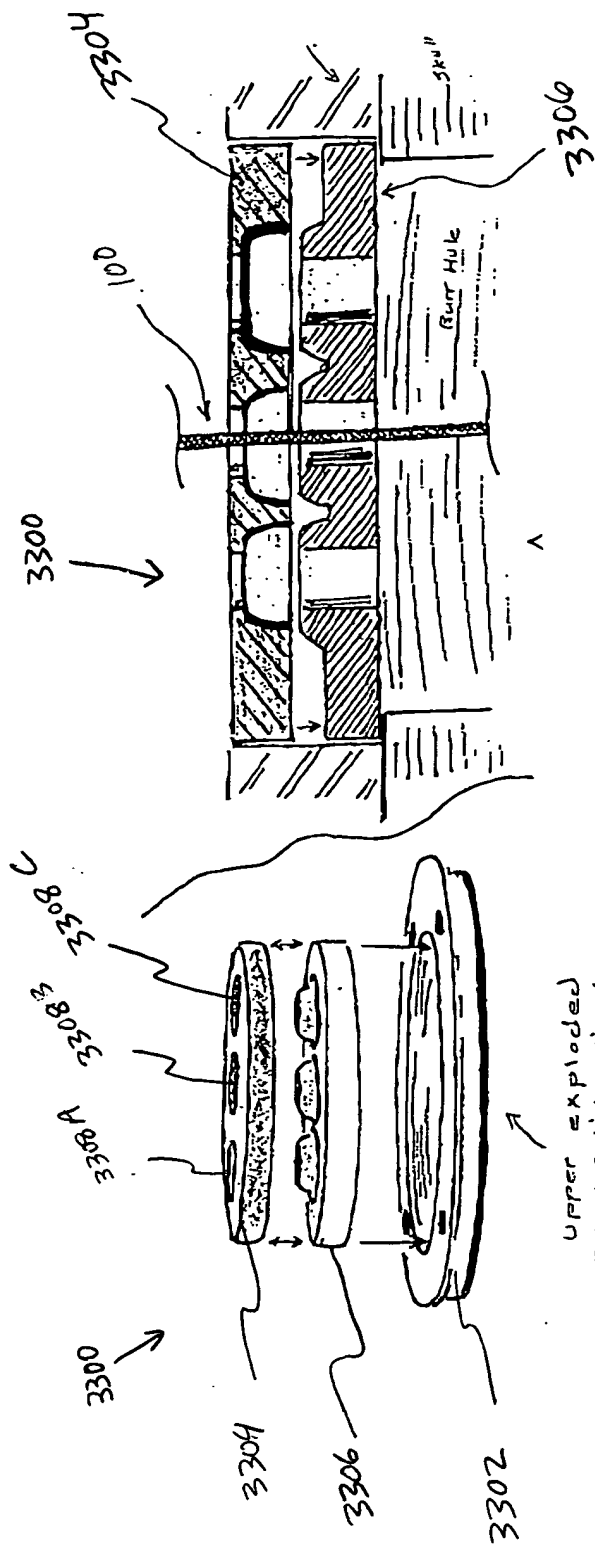
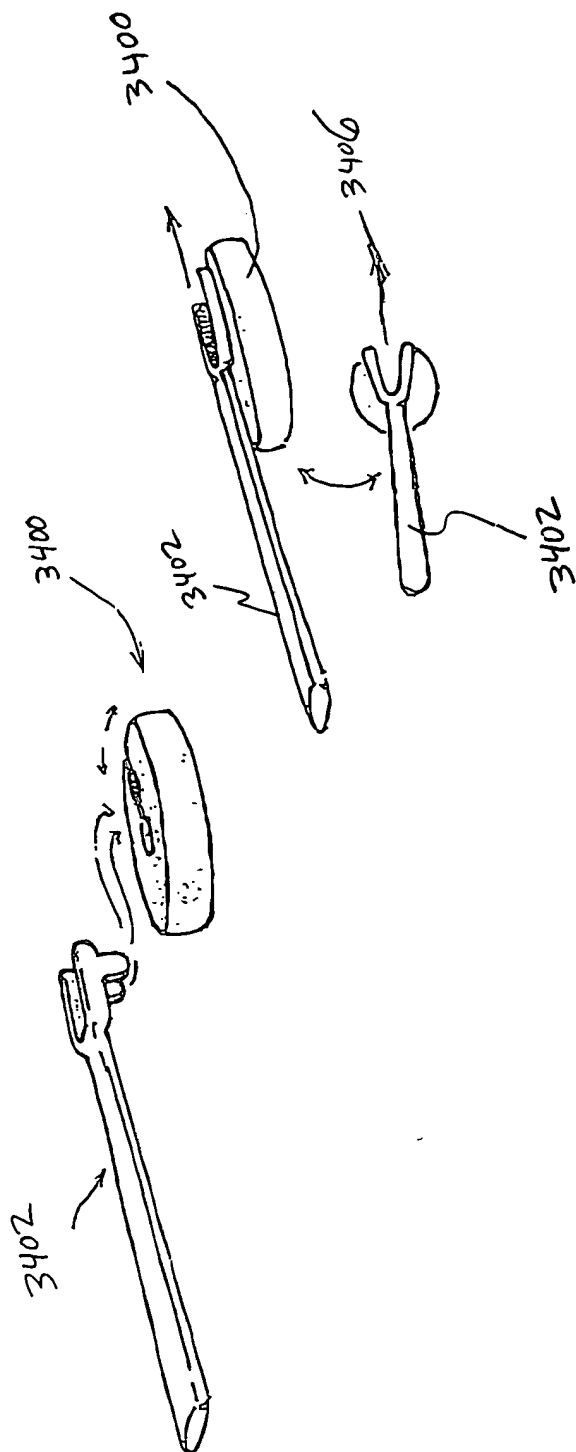


FIG. 33



FIG. 34



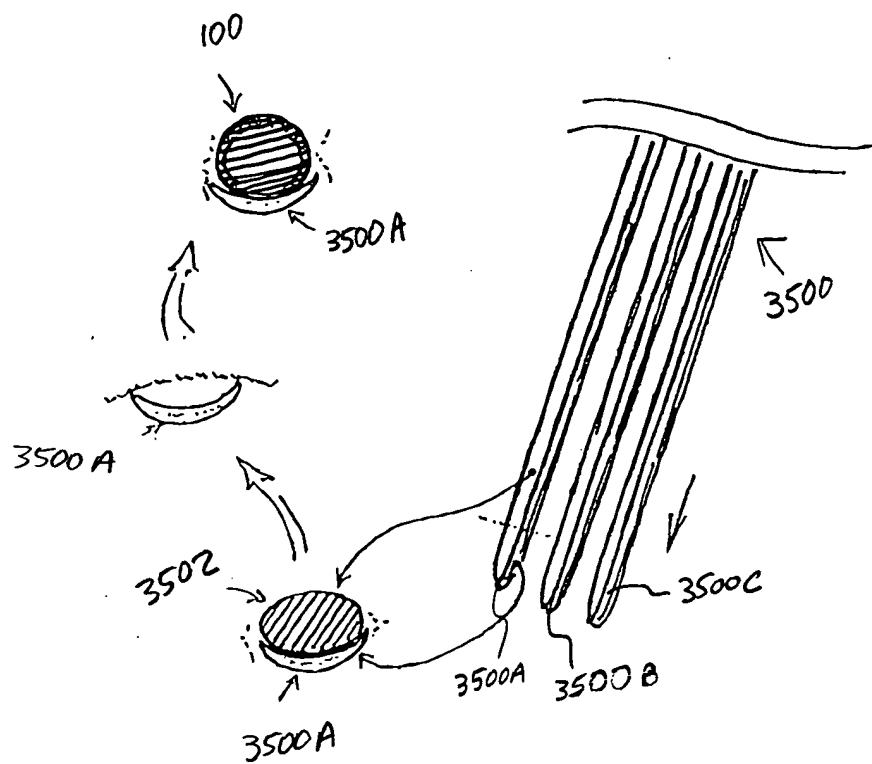


FIG. 35

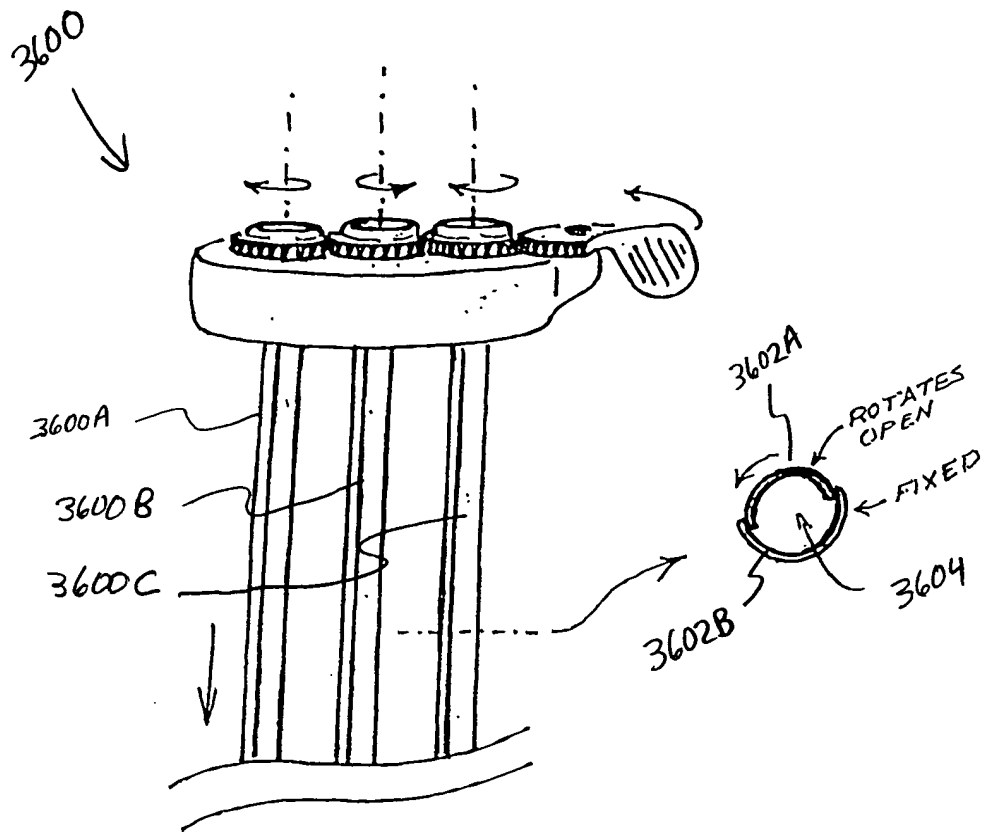


FIG. 36

FIG. 37

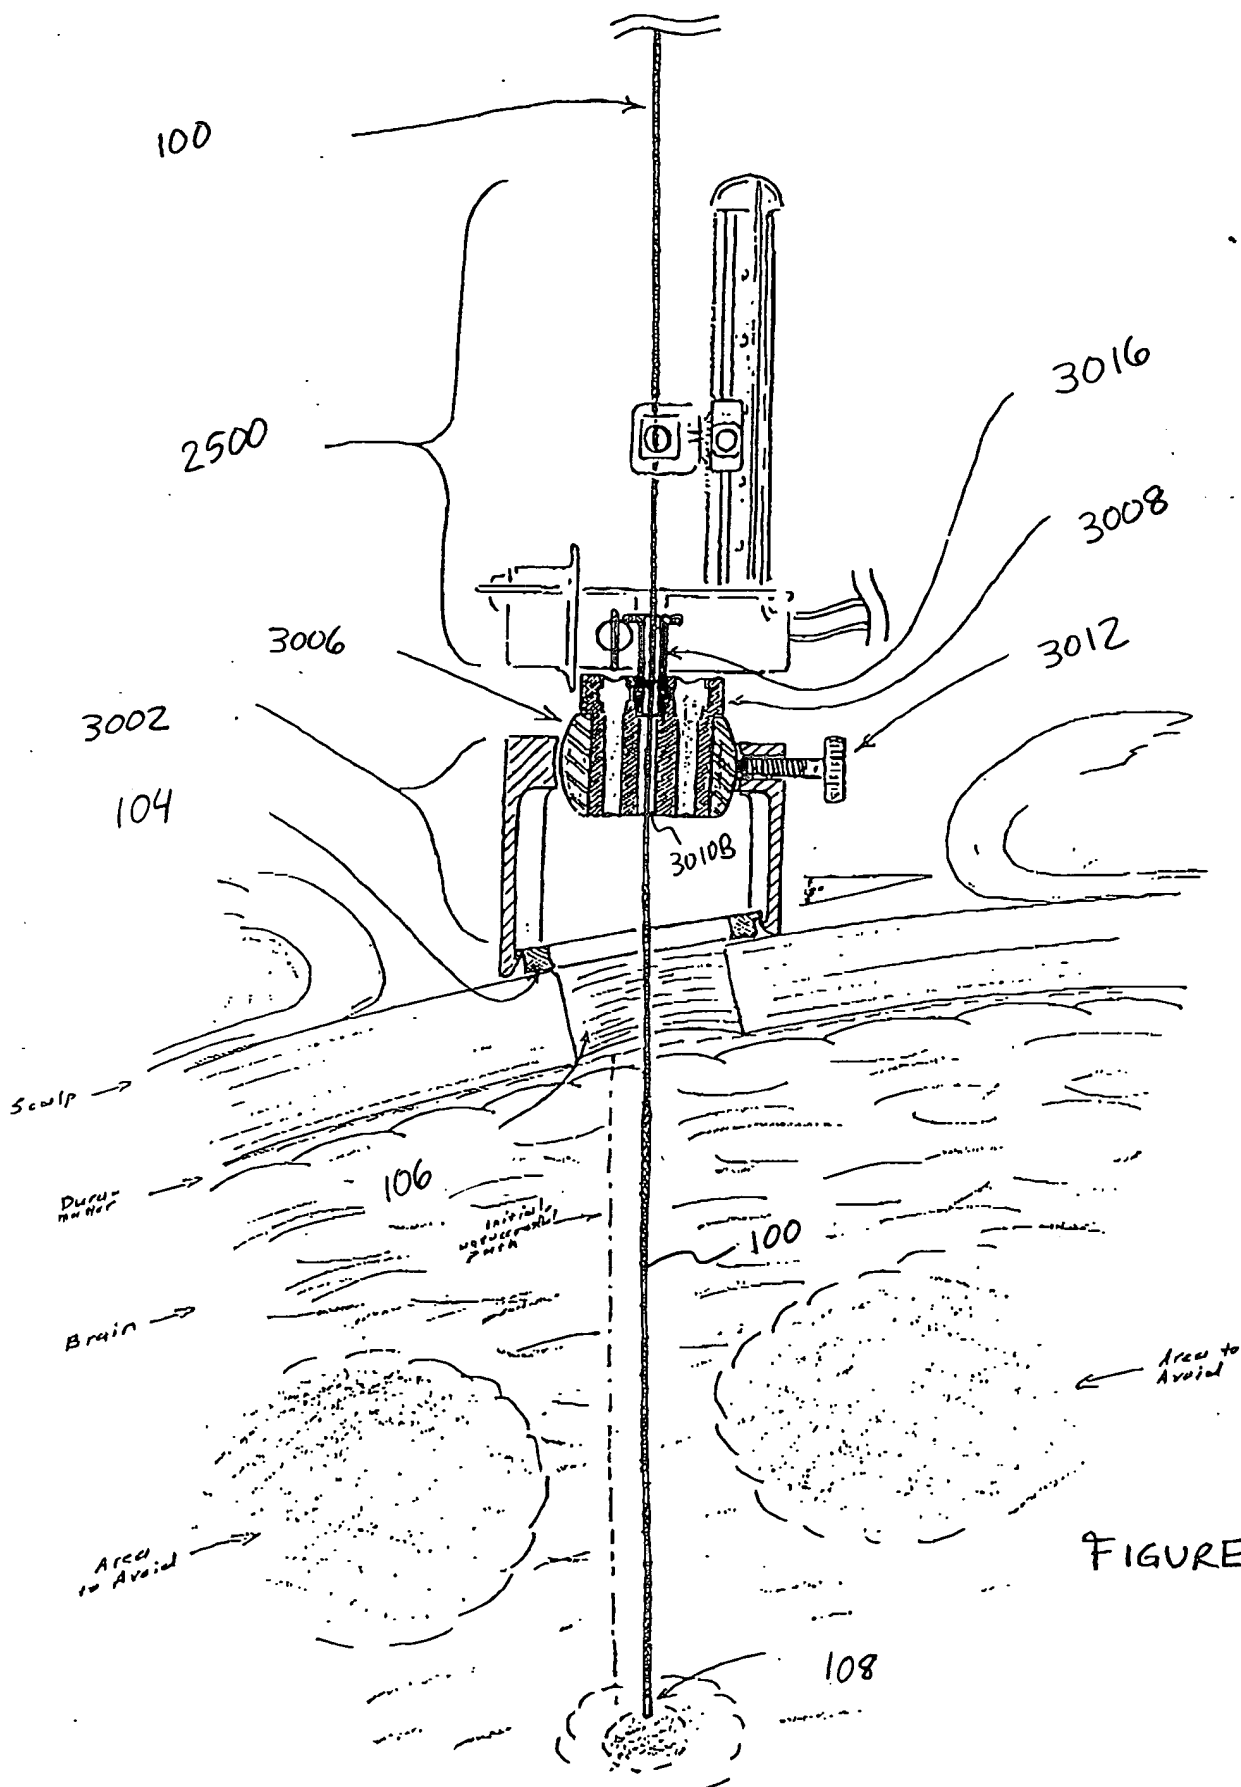


FIGURE 37

FIG. 38

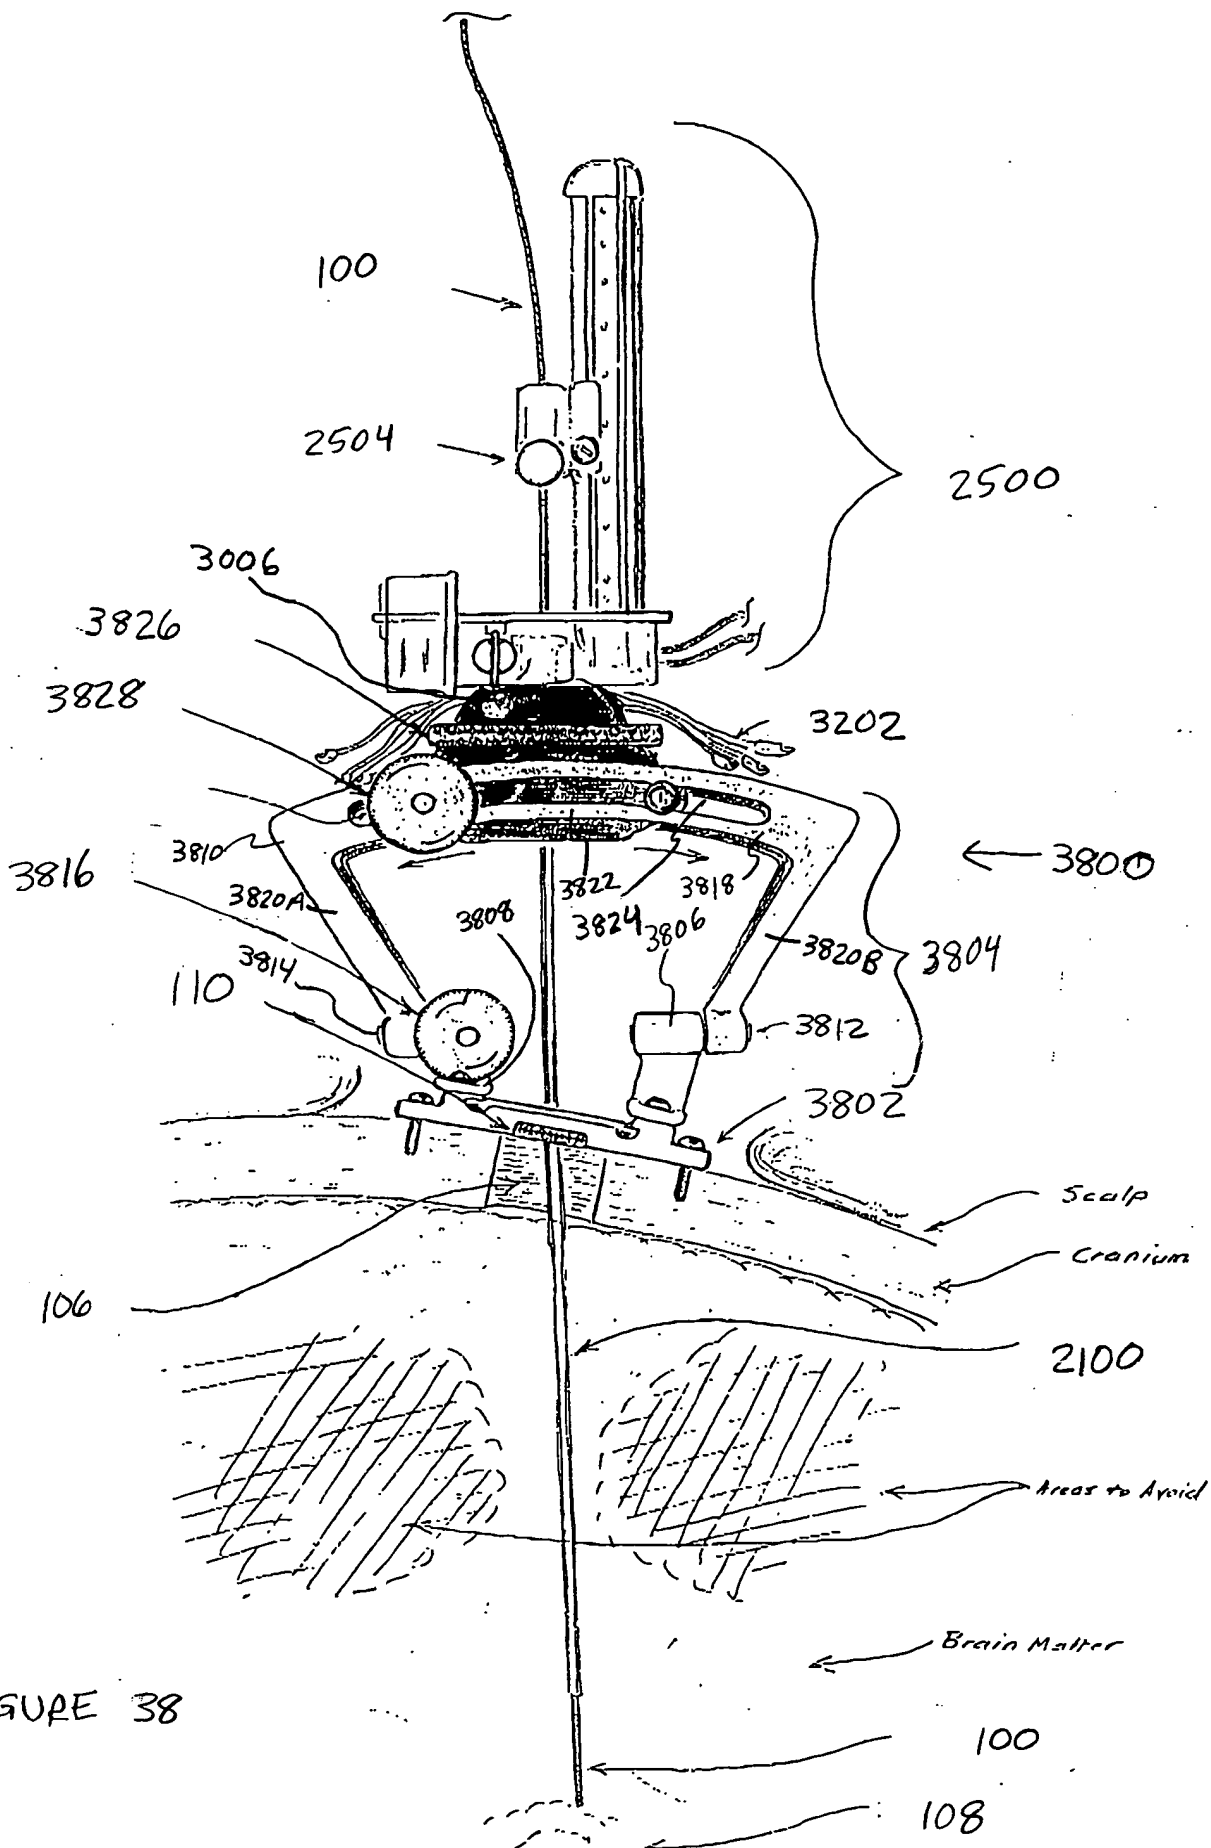


FIGURE 38

FIG. 39 is a perspective view of the assembly 1120 in a disassembled state, showing the housing 1120 and the components 3900A, 3900B, 3900C, 3902, 3904, 3906, 3908, 1124A, 1124B, 1124C, 1124D, 1124E, 1126A, 1126B, 1126C, 1126D, and 1900.

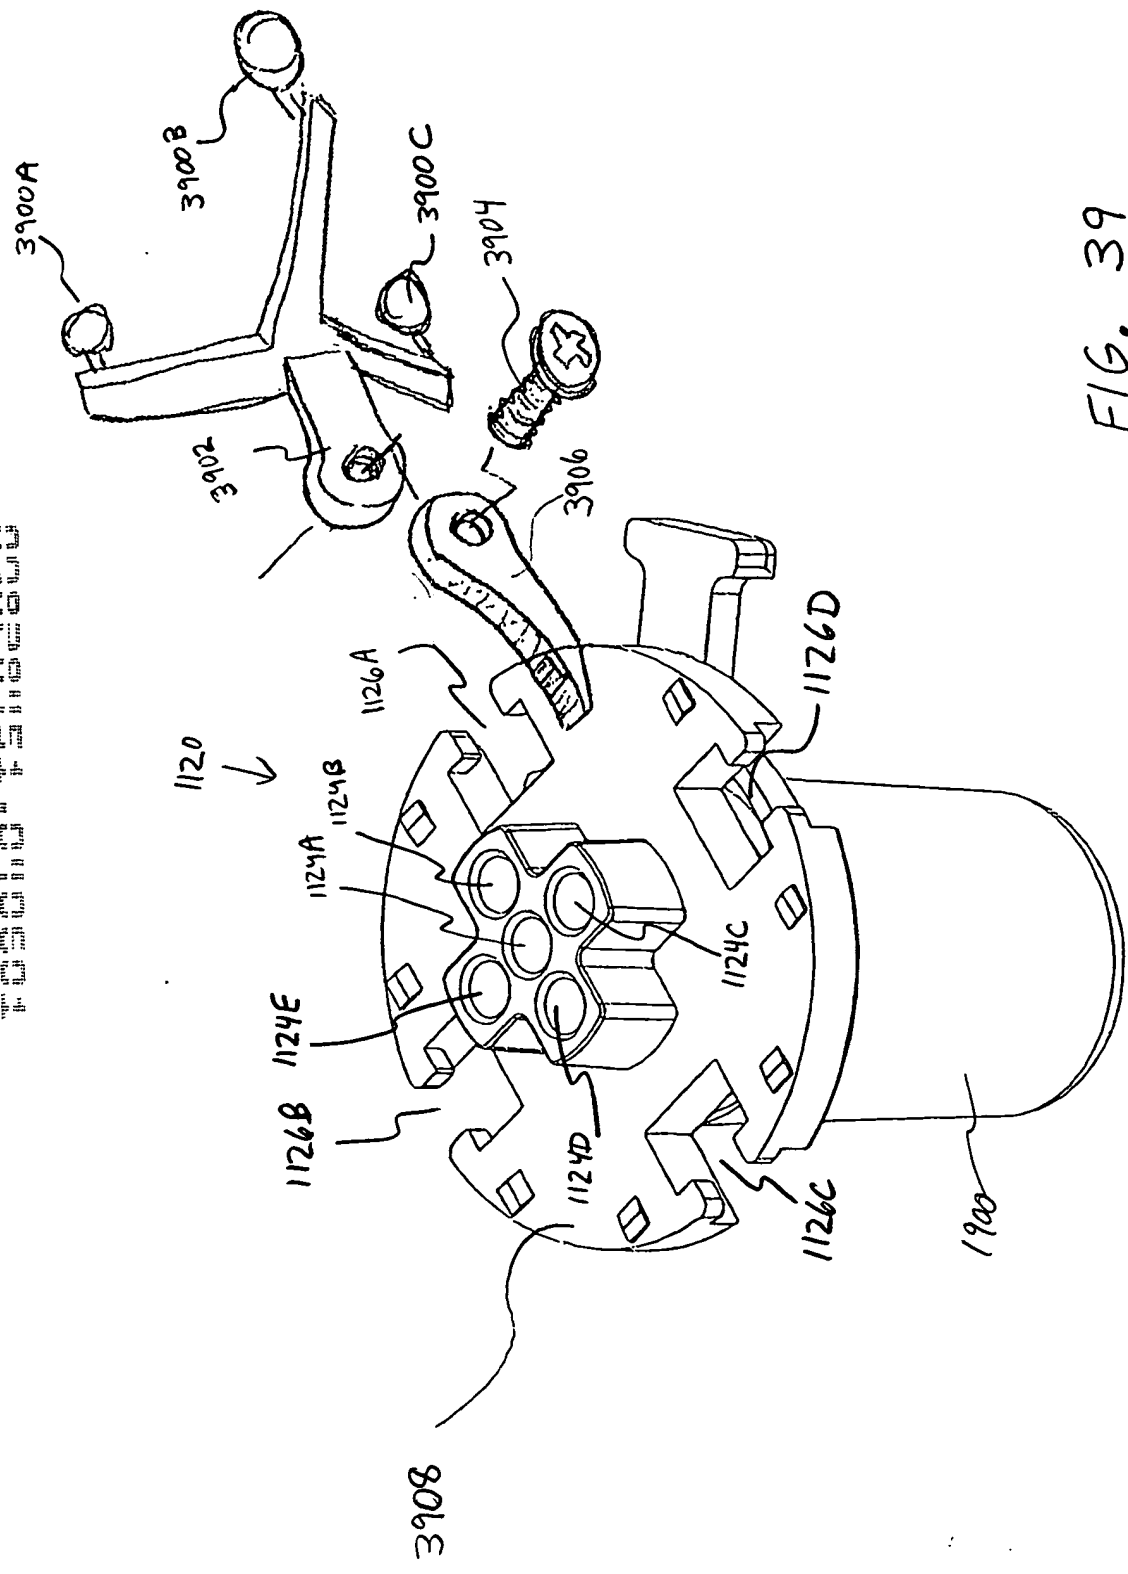


FIG. 39